

10/10/00
 Jc803 U.S. PTO

NEW UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Docket No.
E0710.0000/P001

Total pages in this
submission
84

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

AUTOMATED CONFIGURATION SYSTEM AND METHOD

and invented by:

Joseph Thompson et al.

IF A CONTINUATION APPLICATION, check appropriate box and supply requisite information:

☐

Continuation

☐

Divisional

☐

Continuation-in-part (CIP) of prior application No.:

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 46 pages(s) and including the following:
 - a. ☒ Descriptive title of the invention
 - b. ☐ Cross references to related applications (if applicable)
 - c. ☐ Statement regarding Federally-sponsored research/development (if applicable)
 - d. ☐ Reference to microfiche appendix (if applicable)
 - e. ☒ Background of the invention
 - f. ☒ Brief summary of the invention
 - g. ☒ Brief description of the drawings (if drawings filed)
 - h. ☒ Detailed description
 - i. ☒ Claims as classified below
 - j. ☒ Abstract of the disclosure

Jc760 U.S. PTO
 09/684907
 10/10/00

09684907 " 101000

- ### Accompanying Application

8. ☐ Assignment papers (*cover sheet & document(s)*)
9. ☐ 37 C.F.R. 3.73(b) statement (*when there is an assignee*)
10. ☐ English translation document (*if applicable*)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certified copy of priority document(s) (*if foreign priority is claimed*)
15. ☐ Certificate of Mailing
- ☐ First Class ☐ Express Mail (Label No.: _____)
16. ☒ Small Entity statement(s) -- # submitted 1 (*if Small Entity status claimed*)

--

The filing fee for this utility patent application is calculated and transmitted as follows:

x Small Entity

CLAIMS AS FILED					
For	# Filed	# Allowed	# Extra	Rate	Fee
Total Claims	20	- 20 =		x \$9.00	
Independent Claims	4	- 3 =	1	x \$40.00	\$40.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					
Other Fees (specify purpose):					
BASIC FEE					\$355.00
TOTAL FILING FEE					\$395.00

☒ The Commissioner is hereby authorized to charge and Deposit Account No. 4 - 1073 as described below. A duplicate copy of this sheet is enclosed.

☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.31(b).

Dated: October 10, 2000

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS (37 C.F.R. 1.9(f) AND 1.27(c)) SMALL BUSINESS			Docket No E0710.0000/P001
Serial No. 60/158,316	Filing Date October 8, 1999	Patent No.	Issue Date
Applicant/Patentee: Joseph Thompson et al.			
Invention: AUTOMATED PRODUCT CONFIGURATION AND ESTIMATOR			
I hereby declare that I am: <div style="margin-left: 20px;"> <input type="checkbox"/> the owner of the small business concern identified below: </div> <div style="margin-left: 20px;"> <input checked="" type="checkbox"/> an official of the small business concern empowered to act on behalf of the concern identified below </div>			
NAME OF CONCERN: Edgenet Media, Inc.			
ADDRESS OF CONCERN: 111 Westwood Place Brentwood, TN 37027			
<p>I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 C.F.R. 121.3-18, and reproduced in 37 C.F.R. 1.9(d), for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both</p>			
<p>I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the above-identified invention described in</p> <div style="margin-left: 20px;"> <input type="checkbox"/> the specification filed herewith with title as listed above. </div> <div style="margin-left: 20px;"> <input checked="" type="checkbox"/> the application identified above. </div> <div style="margin-left: 20px;"> <input type="checkbox"/> the patent identified above </div>			
<p>If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed on the next page and no rights to the invention are held by any person, other than the inventor, who could not qualify as an independent inventor under 37 C F R 1 9(c) or by any concern which would not qualify as a small business concern under 37 C F R 1 9(d) or a nonprofit organization under 37 C F R 1 9(e)</p>			

Patent and Trademark Office-U S DEPARTMENT OF COMMERCE

☒ No such person, concern or organization exists.

☐ Each such person, concern or organization is listed below.

ADDRESS:

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

ADDRESS:

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

ADDRESS:

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate (37 C.F.R. § 28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

TITLE OF PERSON SIGNING OTHER THAN OWNER: Director of Development

ADDRESS OF PERSON SIGNING: Edgenet Media, LLC.
111 Westwood Place
Brentwood, TN 37027

DATE: 1/1/80

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
APPLICATION FOR U.S. LETTERS PATENT**

AUTOMATED CONFIGURATION SYSTEM AND METHOD

Inventors:

**Joseph Thompson
Randy Weems
Ted Lessman**

Prepared by:

**Dickstein Shapiro Morin & Oshinsky LLP
2101 L Street, N.W.
Washington, D.C. 20037-1526
(202) 785-9700**

This application claims priority to U.S. Provisional Patent Application No. 60/158,250, filed October 8, 1999, and U.S. Provisional Patent Application No. 60/158,316, filed October 8, 1999, which are both hereby incorporated by reference in their entirety.

5

BACKGROUND

10 In the building and construction industry, job estimation is a time-consuming and costly process. In order to appropriately estimate the cost of any job an individual must assemble both the correct product to satisfy the engineering criteria of a given project and then assemble prices from a variety of data sources. Complex estimates compound the work and cost of this process. In a complex project, estimates are often assembled from a combination of pricing sources. These estimates require both a structured and intimate understanding of the product, its technical specifications, and costs.

SUMMARY

15 An automated configuration system (and method) is provided for facilitating the configuration of desired products, services, or other assemblages that require users to gather and assimilate disparate knowledge of makes, models, types, features, options, limitations, codes, and prices of the desired product/service (or group of the same) to be configured. In accordance with a preferred embodiment, configuration is facilitated
20 through interaction of a user with a frame engine that performs frame-based inferences to discern stored knowledge of a product (or the like), as supplemented by a rules-based inference system.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram illustrating a configuration device in accordance with a preferred embodiment of the invention;

Fig. 2 is a block diagram illustrating a configuration system in accordance with a preferred embodiment of the invention;

Fig. 3 is an exemplary illustration of a product Selection and Configuration display in accordance with a preferred embodiment of the invention;

Fig. 4 is an exemplary illustration of a Preferred Answer display in accordance with a preferred embodiment of the invention;

Fig. 5 is an exemplary illustration of a Standard Answer display in accordance with a preferred embodiment of the invention;

Fig. 6 is an exemplary illustration of a Graphic Selection display in accordance with a preferred embodiment of the invention;

Fig. 7 is an exemplary illustration of multiple Product Code displays in accordance with a preferred embodiment of the invention;

Fig. 8 is an exemplary illustration of a Standard Parametric Drawings display in accordance with a preferred embodiment of the invention;

Fig. 9 is an exemplary illustration of a Composite Unit Design display in accordance with a preferred embodiment of the invention;

Fig. 10 is an exemplary illustration of a Catalog Page display in accordance with a preferred embodiment of the invention;

Fig. 11 is an exemplary illustration of a DataGrid display in accordance with a preferred embodiment of the invention;

5 Fig. 12 is an exemplary illustration of a Custom Shapes Editor display in accordance with a preferred embodiment of the invention;

Fig. 13 is an exemplary illustration of a Pricing display in accordance with a preferred embodiment of the invention;

10 Fig. 14 is an exemplary illustration of an Accessories Module in accordance with a preferred embodiment of the invention;

Fig. 15 is an exemplary illustration of a Line Item Adjust Module in accordance with a preferred embodiment of the invention;

Fig. 16 is an exemplary illustration of an Order Form display in accordance with a preferred embodiment of the invention;

15 Fig. 17 is an exemplary illustration of a Quotes display in accordance with a preferred embodiment of the invention;

Fig. 18 is an exemplary illustration of a Schedule Generator display in accordance with a preferred embodiment of the invention;

20 Fig. 19 is an exemplary illustration of a Product Specifications display in accordance with a preferred embodiment of the invention;

Fig. 20 is an exemplary illustration of an AutoCAD display in accordance with a preferred embodiment of the invention;

Fig. 21 is an exemplary illustration of a Project Information Management display in accordance with a preferred embodiment of the invention;

5 Fig. 22 is an exemplary illustration of a Sales-Representative Information Management display in accordance with a preferred embodiment of the invention;

Fig. 23 is an exemplary illustration of a Client/Customer Information Management display in accordance with a preferred embodiment of the invention;

10 Fig. 24 is an exemplary illustration of a Product Line Review display in accordance with a preferred embodiment of the invention;

Fig. 25 is an exemplary illustration of an Interactive Tutor display in accordance with a preferred embodiment of the invention;

Fig. 26 is a flow diagram illustrating the sales/personnel process flow steps in accordance with a preferred embodiment of the invention;

15 Fig. 27 is a flow diagram illustrating the dealer/distributor use steps in accordance with a preferred embodiment of the invention;

Fig. 28 is a flow diagram showing the architectural process for a millwork system in accordance with a preferred embodiment of the invention;

20 Fig. 29 is flow diagram illustrating the manufacturer use process in accordance with a preferred embodiment of the invention;

Fig. 30 is a diagram illustrating a configuration network, in accordance with a preferred embodiment of the invention; and

Figs. 31 and 32 are illustrations of the hierarchical structures used in accordance with a preferred embodiment of the invention.

5

DETAILED DESCRIPTION

Preferred embodiments and applications of the invention will be described herein. Other embodiments may be realized and structural or logical changes may be made to the embodiments without departing from the spirit or scope of the invention. Although the preferred embodiments disclosed herein have been particularly described as applied to a configuration system and method for configuration of specific exemplary products (e.g., windows and doors), it should be readily apparent that the invention may be embodied to provide configuration and estimation functionality for any number of products, services or the like where configured, customized or assembled-to-order products/services are evaluated, selected, purchased, sold, supported, or otherwise considered.

10

15

In accordance with a preferred embodiment of the invention, a configuration system (and corresponding method) is embodied in a single (or multiple) processor-based system that may be supported in a stand-alone, networked, mainframe, or client-server architecture. A single (or multiple) program memory module is provided for storing one or more computer programs used to perform the functionality described herein.

20

In accordance with a preferred embodiment, one or more user interfaces are provided as part of (or in conjunction with) the configuration system to permit users to

interact with the system. Individual ones of a plurality of client devices (e.g., network/stand-alone computers, personal digital assistants (PDAs), WebTV (or other Internet-only) terminals, set-top boxes, cellular/PCS phones, screenphones, pagers, kiosks, or other known (wired or wireless) communication devices, etc.) may similarly be used to execute one or more computer programs (e.g., universal Internet browser programs, dedicated interface programs, etc.) to allow users to interface with the configuration system.

In accordance with a preferred embodiment, a user (e.g., consumer, sales-representative, buyer, seller, contractor, builder, architect, consultant, organizer, project coordinator, etc.) of the configuration system interacts with the system to configure and/or estimate the cost of a desired product, component, or project. The interaction with the system is preferably through a series of questions provided by the system with input answers provided by the user. The interactive nature of the system aides the user in arriving at the desired product, component, or project selection and the production of any corresponding information (e.g., layouts, pricing, schematics, specifications, etc.).

Fig. 1 illustrates in block diagram form a configuration device in accordance with a preferred embodiment of the invention containing the Core 102, the Frame Engine 104, and the Rules Engine 106 subsystems or modules (described in detail below).

Core 102 is a processing module that can contain a variety of miscellaneous functions for the system. Core 102, for example, may be used to take a user's input and standardize that input. For example, if the user inputs "2 feet, 3 inches," Core 102 can include functionality that converts that input solely to inches (or another unitized number,

e.g., metric units). Another function that may be incorporated in Core 102 is a messaging system that contains all the codes for dynamically loading the other modules. Generally, any functions that may facilitate the processing of input/output data in the system may be incorporated in Core 102.

5 Preferably, Frame Engine 104 is a frame-based inference engine used to process product knowledge, which may be supplemented by an interpreted rules system, based on input data from Core 102 (or other modules) and from users of the system. In accordance with a preferred embodiment, user data is input through user input of answers to a series of questions regarding configuration of a desired product or project posed by the system (as
10 will be discussed in detail below). In accordance with a preferred embodiment, Frame Engine 104 computes available configuration answers for any configuration questions posed to a user at any time (e.g., in any order), and processes the user's answer to such question. When given the value of one or more answers, Frame Engine 104 infers the values of answers to other questions automatically, and thus, eliminates the need for
15 excessive rule constructs, as typically required in a rules-based engine. Through inference, Frame Engine 104 may also remove or insert questions (and their associated answers) based on the user's previous response(s).

In accordance with a preferred embodiment of the invention, Frame Engine 104 is primarily constructed using a frame-based design concept of knowledge organization,
20 representation, and product classification. Frame-based and rule-based expert systems encode knowledge using fundamentally different models.

In the context of product configuration, the problem an expert system is supposed to solve is as follows: given a set of options (“questions” to be presented to the user), each of which has a set of legal attributes (“values” with which the user may answer the questions), how are the options/attributes themselves related to each other (which options/attributes remove [or ‘constrain away’] other options/attributes, which options/attributes are ‘interdependent’, etc.).

As an example, if the user has answered options A, B, and C with attributes x, y, and z, the expert system must then determine what are now the legal attributes for some other option D. In order to do this, an expert system first has to encode the relationship between the options in some manner (i.e., represent the knowledge). Then, as the expert system is provided current choices as inputs in real time (i.e., “the user has answered options A, B, and C with attributes x, y, and z”), the system must now apply its encoded knowledge to the problem “what are the legal attributes for D” in order to supply the solution(s).

A rule-based expert system generally represents knowledge using a large collection of If-Then-Else constructs (i.e., “If the user has answered option ‘A’ with attribute ‘x’, Then attribute ‘y’ is no longer available for option ‘B’, Else . . .”). This approach, however, is a unidirectional encoding: if the conditional portion (the user has answered option ‘A’ with attribute ‘x’) of the statement is true, the resultant portion must also be true (attribute ‘y’ is no longer available for option ‘B’). The converse (if attribute ‘y’ is no longer available for option ‘B’, then the user has answered option ‘A’ with ‘x’) is not necessarily true, nor in general should it be.

However, a rule-based expert system requires that the inverse rule must be written separately if it is deemed necessary. If the product knowledge being modeled is complex, the required rules and inverse rules can grow into a very larger number. In addition, applying this type of knowledge representation to the problem “the user has answered options A, B, C with attributes x, y, z; now what are the legal attributes for this other option D?” involves using an interpreter or compiler that understands the rule syntax so as to apply the rules to the problem.

On the other hand, the frame-based Frame Engine 104 encodes knowledge in an entirely different manner that does not suffer from this “inverse rule” problem. At its most fundamental level, Frame Engine 104 represents knowledge in a hierarchical tree-like structure. The nodes of the tree are generally called “frames” (e.g., corresponding to product categories) and each node contains a collection of “slots” (e.g., corresponding to product features and options). A slot is a one-to-many relationship between an option and a subset of the legal values (e.g., attributes) for that option.

Textually, a slot is represented as follows:

A= x, y, z

where ‘A’ is an option, and ‘x’, ‘y’, and ‘z’ are attributes for option A.

In general, a frame contains multiple slots, and has child frames as well (because of the tree structure). Conceptually, all the slots in a frame “go together.” If at least one of the slots in a frame is found to be invalid (e.g., Slot “A = x, y, z” is in a particular frame, but the user has answered ‘A’ with attribute ‘w’), then the entire frame (along with all of its

other slots and all of its child frames) is invalid. Functionally, products and attributes in such a frame are removed from the configuration process. Applying this knowledge representation to the problem “the user has answered options A, B, and C with attributes x, y, and z, now what are the legal attributes for this other option D” involves Frame Engine 104 first marking the appropriate portions of the tree invalid as the user supplies answers to options. Then, to actually provide an answer to the question “what are the legal attributes for some other option D,” the engine will look for all the frames which have not been marked invalid and which reference ‘D’ (i.e., have a slot involving ‘D’) and then combine all the attributes found in these slots (eliminating any duplicates). At the conclusion of this process, the answer (in many cases, a multi-faceted answer in terms of associated data [a price, an image, a set of drawings, etc.]) is generated and displayed.

In accordance with a preferred embodiment of the invention, a Product Knowledge Builder module may be provided for use in constructing, storing and interrelating data concerning products, components, configurations, etc. to optimize the operation of Frame Engine 104.

The Product Knowledge Builder allows the entry of product knowledge in an intuitive hierarchical fashion. The knowledge is entered into a tree-like structure very similar to the *Windows* File Manager or Explorer. Once the product knowledge has been entered, this tool “builds” the knowledge into a single output file. This process both compiles the knowledge into a hierarchical tree structure and then optimizes it. The output file is then ready to be processed by Frame Engine 104.

The following simple example will illustrate the differences between an If-Then-Else rule based system and one utilizing Frame Engine 104 in accordance with a preferred embodiment of the invention:

There are four people who are identified by a letter, color, and number.

5 **Jim is A, Blue, and 3.**

Ted is B, Red, and 2.

Randy is A, Red, and 4.

Roy is B, Blue, and 2.

The first screen in an application would prompt the user for choosing a letter.

10 (As an additional requirement, the questions can be answered in any order, and the user might skip the first screen and come back to it later.) The If-Then-Else rules to handle such option/attribute pairs are as follows:

if Color has no answer and Number has no answer then

Letter is A or B

15 **else if Color has no answer then**

if Number is 3 or Number is 4 then

Letter is A

if Number is 2 then

Letter is B

else if Number has no answer then

Letter is A or B

else if Color is Blue and Number is 3 then

5 **Letter is A**

else if Color is Red and Number is 2 then

Letter is B

else if Color is Red and Number is 4 then

Letter is A

10 **else if Color is Blue and Number is 2 then**

Letter is B

Two more sets of rules will still have to be written for the Color screen and the Number screen. The difficulty of adding a new person to the data or, adding another class of question to determine the group's favorite fruit can easily be seen. It is also useful to remember that this sample data is intended to be a trivial example. In contrast, the Product Knowledge Builder would permit the entry of that same data as follows.

After adding the four questions to the system, add the following compound slot:

LETTER	COLOR	NUMBER	PERSON
A	Blue	3	Jim
B	Red	2	Ted
A	Red	4	Randy
B	Blue	2	Roy

To add a new person, a new row is simply inserted, adding the new person's letter, color, number, and name. To add another question such as the group's favorite fruit, a new column is simply added to the slot, and a list of everyone's favorite fruit can be added.

While the actual algorithm for Frame Engine 104 as implemented is likely to be much more complex, the following illustration of the operation of Frame Engine 104 used to implement the above example may be useful:

In the beginning of a configuration session all frames are valid, and the example above has four frames, one for each row. When asked for the list of available answers for any question, the Frame Engine looks down the column for that question. If the row is valid, its answer is added. Accordingly, for the Letter question, Frame Engine 104 sees A, B, A, B. The duplicate answers are combined to arrive at A, B. Now suppose the user answers A. This means unless the frame has Letter = A, it is invalid. The second and fourth rows are thus invalid. Next the user is presented

with the Color question. To find the answers, search down the Color column; the result is Blue and Red for the available answers (Blue from the first row and Red from the third). The user picks Blue. This choice makes the second and third rows invalid.

5 As a result, there is only one valid row left, the first row. The user has effectively finished the selection process by answering only two of the three questions.

Frame Engine 104 is particularly useful when applied to real-world, complex product knowledge challenges. Real-world product knowledge contains relationships
10 between products, knowledge common among similar products, knowledge common among different products, and exceptions to all of the above. The Product Knowledge Builder in accordance with a preferred embodiment contains constructs to handle all of these scenarios.

An important relationship among products can be expressed as: "Product A is a
15 type of Product B" (e.g., a casement is a type of window, a car is a type of vehicle). This relationship is called inheritance. Inheritance is a parent to child relationship, but not in the traditional sense. In human beings, if a parent has a trait, the child may or may not share that trait (e.g., brown hair). In this form of knowledge inheritance, the child must inherit all traits. Inheritance is important, because it allows the software engineer to
20 combine all the identical traits for the children in one logical place: the parent. It is for this reason that the Product Knowledge Builder works in a tree-like fashion. Each frame is a parent with children, which in turn have their own children. For example, if there were a

system for selecting groceries, the logical way to organize the data would look something like that shown in Fig. 31. The Product Knowledge Builder allows the construction of this tree with the result illustrated in Fig. 32.

As illustrated, when the Bread frame is selected, there is a trait defined as bread.

5 This means that all types of buns and loaves can be made out of White, Wheat, or Rye bread, because both Buns and Loaves inherit from Bread. If any special types of Buns were defined by adding "children" to the Buns frame (i.e., hamburger or hot dog) these new types also inherit White, Wheat, or Rye. Children inherit everything from their parents, grandparents, and great grandparents, all the way up the tree. In the future, if the store
10 added Pumpernickel and carried it for all types of bread, such information could be added to the Bread frame. If the store offered Pumpernickel for Loaves only and not Buns, then Pumpernickel could be added to the Loaves frame. Without the power of inheritance, Pumpernickel would have to be manually added to every type of bread. There are some types of product knowledge that may be shared among different frames in the tree, but
15 which cannot use inheritance. In the groceries example, a trait of this sort would be packaging. Not all groceries come in packages, and sometimes the same kind of product might be available with or without packaging (for example, packaged bread versus bread from the deli). If packaging is available, there will be some product knowledge that applies to all packaging (e.g., servings per container). There is still a need to keep this type of
20 knowledge in a single place for ease of maintenance, and this methodology as incorporated by the Product Knowledge Builder is called frame re-use. A frame can be defined by itself to represent such knowledge, which can then be added into the tree at whatever points are appropriate.

In accordance with a preferred embodiment, although Frame Engine 104 is a frame-based inference engine, it also includes the ability to process data using rules files, making Frame Engine 104 more of a hybrid engine. It is foreseeable that some custom answers are more conveniently handled using rules files rather than building the product knowledge. A rules-based filtering methodology may be used, for example, for filtering output from Frame Engine 104 to comply with certain rules established for a particular product, component, configuration, project, or the like. Similar filtering of unwanted answers, or inapplicable questions may be useful. Rules-based functionality may also be used to add special answers, perform calculations, generate user warnings, or any other special processing required for specific system implementations.

In accordance with a preferred embodiment, Rules Engine 106 may be added to supplement the operation of Frame Engine 104. Rules Engine 106 is typically employed to handle special cases, exceptions, and functionality that are specific to a product line or product series. Rules Engine 106 may also be employed to perform all (or some of) the rules-based functionality (discussed above) as utilized by Frame Engine 104.

In accordance with a preferred embodiment, any number of additional modules may be added to serve a supportive and optional role (called on an “as-needed” basis). A Pricing Engine, for example, may be added that uses data from Frame Engine 104 and/or Rules Engine 106 to generate prices. Price reports can be graphically generated and prices can be calculated and displayed to the user in multiple currency types. A CAD Engine Module may be added to read CAD drawings and enable multiple CAD drawings to be displayed simultaneously, with separate components to be overlaid upon one another to form a complex illustration. Specifically, the CAD Engine may handle the determination of

which components need to be overlaid and may present a list of the files containing the required components to a CADView control (not shown), which may in turn read the AutoCAD files and display the components on the user interface. The CAD Engine may also print, copy or otherwise output the CAD files.

5 Fig. 2 illustrates a configuration System 200 in accordance with a preferred embodiment of the invention. Specifically, System 200 may include a User Interface Subsystem 202, Data Analysis Subsystem 204, Graphics Formatting Output Subsystem 206, Configuration Subsystem 208, and Data Storage Subsystem 210.

10 User Interface Subsystem 202 enables the interaction between the user and the system. It may interact with any component of the system. Graphics Formatting and Output Subsystem 206 performs calculations and preparations for the display of graphical and/or textual representations to the User Interface 202. This subsystem may include a variety of graphical modules such as a Parametric Drawing Module, a Schematic Configurator, a CADControl/CADVU Module, a Bid Quote Generation Module, a
15 Specification Generator Module, etc.

 Data Analysis Subsystem 204 accesses and processes data from the Data Storage Subsystem 210 and provides results to the Configurator Subsystem 208 (or other modules as required). The Data Analysis Subsystem 204 may contain a variety of analytical and computational modules such as a Regular Expressions Engine, a Product Code Engine, a
20 Pricing Engine, a Mulling Engine, etc.

 Configurator Subsystem 208 (an example of which is shown in more detail in Fig. 1, as described above) processes questions presented to the user and the answers

received from the user. Based on the data in the Data Storage Subsystem 210 and the established data relationships, the Configurator 208 builds the product configuration. The Data Storage Subsystem 210 may serve as the data repository for the collective knowledge of the system. Product knowledge and pricing data may be stored in Data Storage Subsystem 210 to be used by the various modules. The Data Storage Subsystem 210 may include a variety of memory modules such as a Repository Module, a Pacifier Module, a Buffer Module, an Import/Export Module, a Preferences Module, etc. The Data Storage Subsystem 210 may also store the series of questions to be selected (e.g., by Frame Engine 104, by Rules Engine 106, etc.) for output to the user interface in response to configuration data input from the user interface.

The Parametric Drawing Engine that may be added to the system takes descriptions of configured products, and produces an accurate representation of the product. As an example, the parameters used as input data descriptions can include the width or height of a window, or the existence of grilles. From these descriptive parameters, this module will generate a drawing (e.g., an elevation) or other dimensional product aspect for review by the user (such drawings can be converted to CAD format at the user's option).

The Parametric Drawing Engine can also export its drawings in other for use in other applications (e.g., AutoCAD, in the event that the parametric drawing will be used by an architect). The Parametric Drawing Engine may also tie into other modules such as a Schematic Configurator. The Schematic Configurator is a user interface module and inference tool. Using the Schematic Configurator, the user can view a line drawing representing a configured product (e.g., window) on the user interface, and add other units

to the product. Thus, the end user might start out with a single unit and he/she might then add two flanking windows, one on either side of the product. The user can designate which to sides to add windows and can even add other product types, such as a round-top window above. The Schematic Configurator can interface with the Frame Engine 104, seeking matching components to the previously selected configuration. Frame Engine 104 will match appropriate products between the two modules based on any number of product attributes and parameters.

A Preferences Module may also be included in the system. A Preferences Module allows the user to define a set of preferred answers for questions applicable to products in a project. In a preferred embodiment, the set of preferred answers may be based on user selected preferences, regional specification preferences, manufacturer compatibility preferences, etc. As an example, the user can initiate a project and choose “white clad” windows. The user can then set “white clad” as a preference for that entire project. As a result, for every item that the user configures for the project, the system will reference the Preferences Module and will automatically retrieve the preference values by default and override other items. The Preferences Module can also automatically inform a user that the selected preference is unavailable for a given product during the configuration of that product.

EXAMPLES

As an illustration of exemplary commercial embodiments of the invention, the following descriptions of the invention as variously implemented in different iterations of a system for (and method of) configuring window products is provided below.

5 In this exemplary embodiment, the system can display the entire structure of product knowledge associated with the desired product or product line. In particular, two “lists” are displayed in the primary product selection and configuration screen shown in Fig. 3: one for questions 10, and one for answers 12.

10 In a typical usage scenario, the user starts at the beginning of a question list, the first of which may present the user with a certain product type, such as a window or a door. As questions 10 are answered by the user, other questions 10 that no longer apply are automatically removed from the list. In some cases, answering questions 10 will actually add new questions 10 to the list or will automatically answer other questions 10. Because the entire product knowledge structure is always accessible, the user can answer questions 15 10 in whatever order is desired, although the default order is generally designed to reflect the flow of a typical product configuration. If the user selects “window,” the configuration system directs questions to develop answers pertinent to window configurations only.

Referring to Fig. 4, preferred answers 14, or Preferences, are pre-determined questions 10/answer 12 pairs consisting of any combination of product attributes which 20 will be used repeatedly. Preferences may be useful to save time on large projects or jobs, and a preference set 16 is typically determined for specific product attributes that fit a particular purpose. Once a preference set 16 is defined, it can be used repeatedly thereafter

to save time in the product selection process. If the user activates Preferences, the system will automatically select the question 10/answer 12 pairs in the preference set 16 and apply them to the product being configured at runtime. Any number of question 10/answer 12 pairs can be set up as preferred values. Libraries of Preferences may be saved to files for use
5 with repeat customers or recurring product requests.

Referring to Fig. 5, Standard Answers 18 is a feature providing the ability to display to the user the “standard” answer 12 for a particular product attribute. Standard Answers 18 can also be automatically selected similar to Preferences and are flexible enough to be changed by the user during the configuration process (i.e., Standard Answers can be
10 applied to some products in a project but not to others). If the user activates Standard Answers 18, the system will automatically answer 12 all questions 10, which have answers defined as “standard” and apply them to the product being configured at runtime.

Referring now to Fig. 6, Graphic Selection is a feature which provides a graphic representation 20 of attributes (if applicable), which can represent an answer more clearly
15 12 than a text description. This feature is particularly useful for the illustration of attributes that would otherwise require either extensive text description or which can be better shown with an image 22. The Graphic Selection array can accommodate a range of static or “animated” electronic representations, including portable network files, metafiles, bitmaps, or other graphic representations.

20 The system also provides Custom Answers. Custom Answers is a feature designed to accommodate direct user input for an answer 12 for which there exists one of the following conditions: 1) an acceptable range of incremental values (e.g., dimensional

variables); 2) values defined as “other than the values presented” (e.g., custom operation of a twin casement window); or 3) values that are completely undefined. When a particular question 10 permits custom value answers 12, the Custom Answers box can automatically appear. The system allows the user to enter custom values for dimensional attributes such as unit dimension width, unit dimension height, etc.

Ultimately, the questions 10 and answers 12 guide the user to a desired configured product. From that point, the invention can accurately calculate how much the configured product is going to cost. In addition, the consumer can obtain detailed product information, including specifications that follow standard formats for engineering and architecture.

Referring to Fig. 8, Standard Parametric Drawings 28 can be generated based on the dimensions of a manufacturer’s existing products. Parametric drawings 28 can apply to any product where “views” (e.g., front, top, side) of the product are defined as product attributes. Custom Parametric Drawings 28 can also be generated in accordance with the preferred embodiment of the invention if the value range(s) for the drawings of the applicable products can be defined.

The Schematic Configurator (SC), is used in this example as a tool designed to allow the user to manipulate parametric drawings 28 of products. Using “Drag and Drop” techniques, the user can design and view a variety of product elevations, manipulate individual components, and graphically edit composite unit designs. The SC module can also be used to select and configure products, as well as manipulate, scale and assemble both pre-defined and custom shapes and sizes into composite units. The SC also allows the

elevation designs to be printed, copied and exported for use in other software applications (e.g., CAD). All pricing information driven by the manipulation of product components may be tracked including mulling charges, custom grille pattern designs, grille types, etc. As a unit is configured, the SC gathers the dimensional information and processes it to display an elevation. When a unit configuration is complete, it can be viewed in the SC where any necessary changes can be made (dimensional changes as well as other attribute changes) and other units can be added.

Referring to Fig. 9, composites of products can be created. Composite unit design, assembly and verification are controlled through the SC. When more than one single unit 30 is placed together in the SC, a Custom Composite Unit 32 is created. This placement can be verified by clicking the Mull button 34.

Other products can be added to a product already displayed in the SC with three different methods: 1) the Copy function, which creates an exact copy of the selected item; 2) the New Component function, which calls the Selection and Configuration display (Fig. 3) for the configuration of an entirely new unit to be added to the existing unit; and 3) the Design option 38. described below.

The Design option 38 in the SC allows the user to add component units 30 that can be mulled 34 to the existing components. As an example, if the user wants to add a round top to an existing rectangular unit 30, the Design option 38 will list all units 30 that are available. The user chooses "Add Round Top" from the list and the system will add the nearest sized round top to the existing unit 30 while simultaneously matching all other relevant attributes. If a new component unit 30 is added which contains attributes not

applicable to the base unit 30, the system will present the user with only those questions 10 specifically applicable to the new component and which require the user's response. The Mull option allows the user to verify that mulling of two or more units 30 can be done. Notification of shop, Field or Invalid mull (depending on the units 30 that have been
5 selected) will be presented to the user with a pop-up or "soft" warning display.

Referring now to Fig. 10, this exemplary embodiment of the invention can incorporate a Catalog Page feature. The Catalog Page feature displays dimensional attributes whose ranges can be shown in tabular form. Its format is derived from printed product information sources that display such dimensional variables. Catalog Page
10 Drawings 40 provide the user with graphic parametric representations using the widths and heights of the class of products being selected. Unit 30 heights 42 will be displayed down the side of the selection box and the widths 44 will be across the top of the array. This feature clarifies dimensional information presented in text form and provides visual feedback with respect to the scale and size of selected products.

Referring to Fig. 11, product information can be displayed in a DataGrid. The DataGrid is a tool that allows the user to view a table of answers 10 for a list of questions 12. Similar in form to catalog pages, DataGrids reflect tabular displays of product attributes found in printed catalogs and price books. In this view the questions 12 are presented across the top of the DataGrid instead of down the left hand side of the page.
20 The DataGrid is useful where product questions 10 and answers 12 have a one-to-one correspondence.

Referring to Fig. 12, a Custom Shapes Editor allows the user to size custom shaped products. The example shown in Fig. 10 directly applies to windows and doors, but may apply to any customizable product. The Editor is automatically opened when a custom shape product is selected as a product category. The Custom Shapes Editor is generally used in conjunction with Catalog Pages to select the general product shape (see Fig. 10) and permits the user to select and specify any combination of dimensional parameters 48 within the engineering limits set by the manufacturer. The Editor also displays a parametric representation of the custom product for inclusion on quotations. All pricing formulas relating to, for example, glass size, glass area, grille patterns and types, frame side lengths, and other parameters 48, can be driven with the Custom Shape Editor.

Referring to Fig. 13, this exemplary embodiment of the invention utilizes data tables and formulas to look up, calculate and store base prices 50 plus add-on prices 52 of available product options. The total price 53 can include project-based price adjustments if applicable. Pricing of products utilizes a combination of values accessed from a table and enhanced by formulas, which calculate up charges, add-ons and other product options. These methodologies allow the lookup, calculation and storage of unit base prices 50 plus prices 52 for all applicable product features and add-ons. Project-based price adjustments are also available for customer discounts, promotions and competitive bidding situations.

An accessories module is added containing product accessories 54 supplied by the manufacturer in conjunction with its primary products. The accessories module can include lineal products (e.g., extension jambs, molding, mull covers, etc.) as well as individual or boxed parts and components (handles, hinges, operators, etc.). This module can also be used to add accessories 54 to a quote that are purchased from other sources.

Such additional items are added by entering text descriptions in a text box along with the prices for such items. All accessories 54 entered through the module appear on the quote as individual line items. Functionality can also be included to price accessories that are configurable (i.e., items which are defined by attributes displayed and represented in the Selection and Configuration display (Fig. 3). These accessories or replacement items require product knowledge description and definition similar to primary products and present the user with relevant questions and answers as already described.

Referring to Fig. 15, this exemplary embodiment of the invention provides a function to enable line item discounting for products, product lines and related attributes. Line item discounting can be applied to specific configured units; specific attributes (e.g., screens, grilles, etc.) or configured composite units. All of the line items for which discounting is available are displayed in the Line Item Adjust Box 56 lists. The Line Item Adjust box lists all applicable items, and price adjustment may be applied as follows: 1) none; 2) by multiplier; 3) by a flat fee; or 4) percentage (%). Using the price adjust function, additional price adjustments can be applied to specific clients, individual units within a project, individual projects, or to groups of projects.

Referring to Fig. 16, this exemplary embodiment of the invention enables production of a variety of outputs, one of which can be an order form as shown. The client manufacturer can derive the format, content and design of the order form from an existing form in use. Order forms can contain all codes 26 necessary to build a specified product as well as pricing and dealer/distributor information. The order form is a tabular view of the information needed to build the set of products defined by a particular project. Also included is an “electronic order form” mechanism through which comma or tab delimited

ASCII files can be created and exported. These files can be imported by other applications and may be designed to meet the needs of each manufacturer.

Referring to Fig. 17, this exemplary embodiment of the invention enables the production of quotes, which include scaled elevation drawings of the product, reflecting the parametric drawings 28 generated during product selection and the use of the Schematic Configurator module. Also included is a list of all options chosen, the unit base price 50, add-on prices 52 for non-standard choices, total price 53 for each product, and a grand total 60 of all products in the project.

Referring to Fig. 18, this exemplary embodiment of the invention can provide a Schedule Generator. The Schedule Generator can build a product schedule 62, listing all products included in a project, and relevant attributes assigned to each product, plus the system assigned product code 26. The Schedule 62 is constructed as products are selected and constitutes a valuable tool for use by sales people as well as design and construction professionals, providing a full view of the products to be used in a construction project. When an attribute of any unit 30 is changed, the change is reflected on the Schedule 62 as well. The Schedule 62 can be displayed on-screen or printed as hard copy.

Referring to Fig. 19, the exemplary embodiment of the invention enables generation of product specifications 64. After a product has been configured and the user requests a technical specification 64 for that product, the Specification Generator gathers all relevant product information and produces a valid proprietary specification which conforms to the Construction Specifications Institute (CSI) three part section format. The Specification Generator works from content-complete template specifications supplied by

the manufacturer. The system can produce unique customized specifications 64 for each product in a project or (as an additional option) a single specification 64 for multiple products.

Referring to Fig. 20, this exemplary embodiment of the invention allows the user to view, print, copy, and export AutoCAD drawing files as DXF files, compatible with a number of CAD systems under the Windows environment. This embodiment of the invention has the ability to do multi-layered component assembly of DWG files. Component assembly is the process of displaying several DWG files at once, which overlay one another to compose an entire detail. The image 66 displayed as a section detail is actually made from three to five separate sub-assembly drawings, and several cross section details can be displayed simultaneously. The drawings included are based on the attributes selected during product selection and configuration. The system can export DWG files to a DXF formatted file. This feature allows the editing of exported drawings using a CAD system that accepts DXF files. The system also will allow the user to print drawing details.

Referring to Fig. 21, this exemplary embodiment can include a project database, which maintains and tracks information that is unique to a particular project. The project database contains the sales or customer service representative's name 68, relevant customer information 70 and project information 72 for that particular project. When a new project is created, information from associated databases for sales-representatives and customers is available through drop-down boxes. Fields for Terms of Payment, PO Number, Price Multiplier, and Project name are available, as well as the Line Item Adjust function (Fig. 15). Projects are categorized as Current or Archived and can be moved between these categories as necessary. When a Project is highlighted in the Project window, all units in

that project are displayed. Interfaces to contact management systems, sales systems and sales force automation systems can also be engineered on request. The system allows for record additions, changes to existing records, deletion of records, and duplication of records.

5 Referring to Fig. 22, system can also include a Sales-Representative database, which controls all information for sales-representatives. These items are ID# 76, Name 78, Territory 80, phone number 82 and fax number 84. The system allows for record additions, changes to existing records, deletion of records, and duplication of records. The Customer list for each sales-representative can be viewed by selecting a specific sales-
10 representative name in the listing.

Referring to Fig. 23, this exemplary embodiment of the invention can also include a Customer database to control all information for customers. These items are ID# 76a, Name 78a, separate billing 80a and shipping Addresses, Contact name 78b, Customer type 86, and miscellaneous defaults. The system allows for record additions, changes to
15 existing records, deletion of records and duplication of records. Customers are displayed in a listing which includes the sales-representative for each customer.

This exemplary embodiment of the invention can also include an Import/Export function set which permits a project to be built on one computer and exported into a file format, which can be imported into the same application on another computer (provided
20 the product knowledge sets are exactly the same). This function set allows a project to be constructed by a customer and then imported by a dealer, distributor or sales representative

for quote generation, final order pricing adjustment and negotiation. Similarly, projects can be shared between dealers, sales-people and customer service personnel.

This exemplary embodiment of the invention also includes a System Help File. The System Help File can offer an on-line condensed version of the full user documentation typically supplied with the system. The System Help File can provide easily accessible information to assist in the operation of the system. The System Help File can be configured to be context-sensitive so that the Help topics available are driven by the user's position in the system.

Referring to Fig. 24, this exemplary embodiment of the invention can include a Product Line Review function. The Product Line Review offers manufacturer and product line information 88, as well as general industry information 88, as it relates to the manufacturer's product line. Product Line Review is typically derived from each manufacturer's sales and marketing catalog(s), promotional brochures and other printed materials. Product Line Review can include full color or black & white scanned images 90, product features and benefits (as text descriptions), line drawings, technical illustrations and other appropriate product information.

Referring to Fig. 25, this exemplary embodiment of the invention can incorporate an Interactive Tutor. The Interactive Tutor is a series of help screens 92 referenced to specific system features and functions. When the Show Messages (or Tutor) option is checked, the system will present messages on the screen to assist the user with the next step. This option is turned on or off by either selecting the Tutor button or by opening the Tutor Menu and clicking Show Messages so that the check is removed.

Audio/Visual Presentations can also be included as an integral part of the exemplary system. Sound, video or both media combined can be utilized to present, promote or enhance the client company and its products. Examples of this kind of information include videos of manufacturing processes, product installation procedures, or sales and marketing presentations. Audio information can include theme music or sound tracks, which complement video information.

This exemplary embodiment of the invention can also include a Product Information Module. The Product Information module allows the user to view various catalogs as a product is specified. Combining the expert system with the Adobe Acrobat Reader, for example, allows users access to a range of supporting product information. The printed catalogs from which this information is derived are more graphically oriented than CAD drawings and specifications. Generally, the format of this kind of material is PDF files.

Referring now to Fig. 26, flow chart 300 illustrates how another exemplary implementation of a preferred embodiment of the invention can be employed by a sales-representative/user in ordering sales for customers/users in the field. After the program is started at Step 302, the sales-representative will call on new or existing customers to investigate prospective business. The sales representative can then run the system and start a project. At step 304, the representative would initiate the project (Step 304) and a list of all projects would be displayed. The representative can then initiate a new project 308. Alternatively, the system could remain in a "wait" mode 306 until the project button is initiated. Once the project button is initiated, the sales-representative can then type in the client's name and address, and other pertinent information at step 310. Once the client

information is entered then the user is presented with a configuration screen 312 that can be used to begin adding product information.

The manner in which a product is entered consists of the user inputting into the system a request for a new “mark.” A “mark” refers to a configured unit or product such as a window, door, or other assembly. The user can then select a product type, such as a window, at step 314. The user can then begin to configure a new mark and at that point is prompted to answer some questions about the product at step 315 such as the type, size, or style of window desired. The sales-representative/user can input the specific product information, for example, color options, glass type, etc. At step 318, the sales-representative can select a quantity of product for the project. As a result, the system will repeat (320) the same configuration for the number of windows entered in the Quantity data field.

At step 322, the user can create custom composite units. At this point, the user would enter the Schematic Configurator and choose the composite elements for the configurator to construct at step 324. Once the custom configuration is complete, or if the custom composite step is bypassed (323), the user can initiate a quote button at step 326, which enables the calculation of a price quote for the products currently defined by the project. The quote can contain individual descriptions of each product selected in preceding steps with all associated pricing, along with a drawing of each product with any custom composite units. Moreover, the information can be displayed, printed, presented or otherwise output together or separately at step 328. At step 330, the system would provide a price total and a total quote for the project.

Fig. 27 illustrates another exemplary implementation of a preferred embodiment, in which a dealer distributor adds individual sales representatives to the database at step 402. Customer names will then be added at step 404. The system will then check whether all customers have been added at step 406. If not, then it will loop back to add more names at step 408. Once all customers have been added to the database at step 410, the system will query whether the same thing has been done for sales representatives at steps 412, 414, and 416. Once this data has been added, then the system will generate the customer database sales report. Once completed, this program will end.

Another exemplary implementation of a preferred embodiment is shown in Fig. 28. Upon initiating a product customization, the user can create a project 450. A product can be selected 452 to be configured for that project. The product can be configured by accessing the Schematic Configurator 454 to create a custom composite product. This step 454 can be repeated 458 until all the products for a specific project have been configured at step 456. Upon completion of configuration of all products for the project 460, additional projects may be created by returning to step 450 (464). Once all projects have been created and all products for these projects have been selected and configured 462, the user moves on 466 in the system by accessing the Generator for Output Reports 468, whereby schedules, CAD drawings, Technical Specification Sheets, etc. can be created as hard copies 470. After the generation of output reports, the user can export CAD Details to CAD software 472. Before exiting the system, the user can transmit the project and all related information regarding the project to a dealer for a price quote 474, which can also be printed as a hard copy.

Another exemplary implementation of a preferred embodiment is shown in Fig.

29. In this exemplary embodiment, a user/sales-representative can initiate configuration of products in at least three ways: by taking a Telephone Sales and Order Entry 480, by Receiving a printed order form 482, and by Importing electronic project CIP (or other text format) 484. If a Printed order form is received 482, or Telephone Sales and Order Entry is taken 480, the sales-representative proceeds to create or select the customer from the Customer Database 486. Next the sales-representative can Create or Append a project for that customer 488. A desired product can be configured for that project 489. This step can be repeated 492 until all the desired products for that customer or customer's project have been configured. Once all the products have been configured 494, the sales-representative can decide whether or not all the projects have been added for that customer 496. If they have not 498, the sales-representative can return to step 488 and create or access additional projects. If all the projects have been attended to 500, the sales-representative can determine if all customers have been added. If additional customers need to be added to the system or accessed within the system, the sales-representative can return 504 to step 486 to create new files or select customers from the database, and then repeat the aforementioned steps. After all customers have been attended to, the user can transmit a product code (e.g., End Item Code) to back-end manufacturing and/or ERP systems before exiting the system.

If, as shown in Fig. 29, the user imports electronic Project CIP (or other text format), the user can access *Integrated Manufacturing Software* and move on to determine if the Version Control (VC) Number is correct 506. If not, the user can verify by telephone at step 480, and progress therefrom throughout the system as discussed above.

If the VC Number is correct 510, the user can then add the order to any of the Sales Representative, Customer, Project, or Mark Databases 512. Next the user/sales-representative can Transmit the End Item Code to the back-end manufacturing and/or ERP systems 514.

5 In accordance with a preferred embodiment, the functions, features and architectures described above can be part of a network available to enable business-to-business commerce over the Internet. In accordance with a preferred embodiment of the invention, an Internet portal (and a corresponding method) is provided to be the center of a selected vertical market in a particular industry or collection of industries (e.g.,
10 fenestration, or windows and doors as exemplified above). The portal can be an Internet focal point for the participants in the vertical market. The portal can not only incorporate the configuration system described above for use by participants in the portal, but also can be a virtual space for industry news and information as well as a means for facilitating commerce by and between the participating manufacturers, dealers, distributors, and retail
15 customers making up the vertical market, as shown in Fig. 30. In a preferred embodiment, Web server software such as Bondware by EdgeNet Media, Inc., the details of which are incorporated herein by reference, may be used to implement the Internet portal.

The portal provides the central services for its participating members, providing news, advertisements, means for communication between members. The portal also
20 provides a member-to-member commerce channel providing product offerings, configuration tools, ordering and purchasing mechanisms. Fees can be charged for membership to the portal, advertisements viewed or displayed on the portal, or as part of any member-to-member commerce transactions.

The portal can be an authoritative point of information about a given product market or focused to a specific group within the vertical market. The software package creating the portal can be a suite of Web applications enabling the creation of e-commerce communities for business customers. Virtual communities can be created through this portal where customers within the vertical market can shop, learn, play and explore common interests. This portal can incorporate the configuration-related system described heretofore. The portal can be accessible to those with market-specific expertise, and in return for membership in the portal, the participants can provide much of the content themselves in the form of advertising, news, discussions, sales, etc. as shown in Fig. 30.

In accordance with a preferred embodiment of the invention, one or more processor-based systems are used to implement the modules described or apparent from the description herein and to perform the functionality described (or inherent) herein. For each such system, one or more processors (e.g., central processing unit (CPU)) are provided for execution of one or more computer programs stored on any (one or more) known recording mediums. The processor(s) perform, control, or at least inform the various processing steps performed by the system in sending and retrieving data to and from at least one user interface and/or network. A user interface may be connected directly to a bus or remotely connected through a network (e.g., Internet). The network represents (wired or wireless) connection of two or more devices, whether directly or indirectly connected (e.g., directly coupling through cable, indirect coupling through one or more hubs or servers, whether the network is local to the processor-based system, geographically remote from system, or a distributed combination of local/remote network components).

Preferably, one or more of the modules are coupled (directly or indirectly) to one or more database structures for use in supplying storage functionality for the modules in accordance with the operations described (or inherent) herein. The database structures can take any form from an individual floppy disk drive, hard disk drive, CD-ROM, 5 redundant array of independent devices (RAID) system, to a network of the same or other storage devices. As is well known in the art, the database structures may be physically connected within the same location, or have one or more structures remotely located in different locations. Each module may have dedicated or shared access to one or more database structures locally or remotely located from the module.

10 While preferred embodiments of the invention have been described and illustrated, it should be apparent that many modifications to the embodiments and implementations of the invention can be made without departing from the spirit or scope of the invention. Although the configuration system (and corresponding method) has been specifically described in connection with the configuration of a window product, it 15 should be apparent that the system (and method) can be applied to any product, service, or component that is to be designed or configured such as cabinets, rooms, houses, cars, landscape designs, clothing, etc.

While the illustrated embodiments have been described utilizing Internet communications, it should be readily apparent that other communication systems or 20 (wired/wireless) networks (e.g., intranets, private bulletin boards, individual local or wide area networks, proprietary chat rooms, ICQ, IRC channels, instant messaging systems, etc.) using real-time or non-real-time systems in lieu of or in addition to the disclosed Internet resources may also be utilized.

A Pricing Engine module could be added to the configuration system to generate pricing and cost information for individual products, components, projects, etc. both on a real-time, on-going basis, as the user interacts with the system, and also to provide total (or sub-total) pricing data for the configured product or project. The Pricing
5 Engine may include bid and quote generation functionality to facilitate the production and transmission of bid/quotes by users to their ultimate customers. A Product Code Engine (see Fig. 7) may be added to generate (and receive as inputs) codes (e.g., UPC, EIC, etc.) assigned by manufacturers, retailers, or other users, as well as by the system itself for use in processing data associated with a particular product, component, project, etc. The product
10 codes may be used by other modules of the system (e.g., the Pricing Engine) to associate data (e.g., prices) directly with the product codes.

A Communications module can be added to streamline the sales, order entry and manufacturing process: from transaction sites through the plant and to the job site. Thus, for example, the user, sales representative, or other individual can place an order of the
15 configured product/service directly with the provider (e.g., manufacturer). The communication can be accomplished through any known means of communication (e.g., telephone, fax, e-mail, Internet, etc.). The Communications module would provide the system with capability to transmit (e.g., fax) quotes to remote ordering locations.

A Specification Generator module may also be added to generate detailed
20 specifications in textual and/or graphical format for the configured products/services, etc. The specifications may be displayed, output, exported, or transmitted as desired by the user.

The modules described herein, particularly those illustrated or inherent in the instant disclosure, may be one or more hardware, software, or hybrid components residing in (or distributed among) one or more local or remote computer systems. Although the modules are shown or described as physically separated components, it should be readily apparent that the modules may be combined or further separated into a variety of different components, sharing different resources (including processing units, memory, clock devices, software routines, etc.) as required for the particular implementation of the embodiments disclosed herein. Indeed, even a single general purpose computer executing a computer program stored on an article of manufacture (e.g., recording medium) to produce the functionality and any other memory devices referred to herein may be utilized to implement the illustrated embodiments. User interface devices may be any device used to input and/or output information. The user interface device may be implemented as a graphical user interface (GUI) containing a display or the like, or may be a link to other user input/output devices known in the art. Discrete functionality of the system may be separated (logically or physically) to more efficiently operate the system. Many of the fundamental data coordinating functions (e.g., functionality performed by Core 102) may be separated into a Foundation-Level Tools Subsystem. This Subsystem may include a BB Assist Module to create BB structures and the like.

In addition, memory units described herein may be any one or more known storage devices (e.g., Random Access Memory (RAM), Read Only Memory (ROM), hard disk drive (HDD), floppy drive, zip drive, compact disk-ROM, DVD, bubble memory, etc.), and may also be one or more memory devices embedded within a processor, or shared with one or more of the other components. The computer programs or algorithms

described herein may easily be configured as one or more hardware modules, and the hardware modules shown may easily be configured as one or more software modules without departing from the invention. Accordingly, the invention is not limited by the foregoing description, drawings, or specific examples enumerated herein.

5 What is claimed as new and desired to be protected by Letters Patent of the United States is as follows:

1206571 v1; P%ZV01!.DOC

1. A configuration system comprising:

a user interface, wherein said user interface receives input data for a desired configuration; and

5 a frame engine, receiving data input from said user interface, wherein said frame engine outputs configuration data to said user interface in response to a frame-based inference of the input data.

2. The system of claim 1, further comprising a database, coupled to said frame engine, storing configuration data selectively retrieved for output in response to inferences
10 made by said frame engine.

3. The system of claim 2, wherein said frame engine subjects configuration data to be output to said user interface to pertinent rules-based inferences before being output to said user interface.

4. The system of claim 3, further comprising a rules engine, coupled to said frame
15 engine, wherein said rules engine subjects selected configuration data to be output to said user interface to pertinent rules-based inferences before being output to said user interface.

5. The system of claim 2, wherein said frame engine represents data concerning configuration in a hierarchical structure, with frames corresponding to configuration

categories, wherein the frames act as nodes of the hierarchical structure containing a collection of slots corresponding to configuration features and options.

6. The system of claim 5, wherein said database stores data representative of product knowledge pertaining to products that may be configured by the system.

5 7. The system of claim 2, wherein said database stores a plurality of questions for selective output to said user interface based on frame-based inferences made by said frame engine in response to answers input through said user interface.

8. The system of claim 7, further comprising:

a data analysis subsystem performing analysis of configuration data to be output to
10 said user interface; and

a graphics formatting output subsystem providing graphical representations of configuration data output to said user interface.

9. The system of claim 8, wherein said data analysis subsystem comprises a pricing engine providing pricing data corresponding to configuration data output to said user
15 interface.

10. The system of claim 8, wherein said graphics formatting output subsystem comprises a parametric drawing engine providing illustrations of configuration data to said user interface.

11. A method of configuring a project, the method comprising the steps of:

accessing a user interface;

initiating a project for configuration;

configuring the project by entering project selections;

5 performing a frame-based inference in response to project selections made in said

configuring step; and

outputting project configuration data to the user interface based on inferences made

in said performing step.

12. The method of claim 11, wherein said configuring step involves answering a plurality

10 of questions presented, wherein the questions to be presented during said

configuring step are stored in a database and selected for presentation based on

inferences made in said performing step.

13. The method of claim 12, wherein said configuring step further comprises the substep

of presenting preferred answers to select questions presented on the user interface.

15 14. The method of claim 12, wherein said performing step further comprises the substep

of performing a rules-based inference in response to project selections made in said

configuring step.

15. The method of claim 11, wherein said configuring step further comprises the substeps

of:

graphically selecting parameters to configure the project based upon graphic representations of variations of characteristics of components to be selected for the project; and

manipulating schematically configured illustrations of components to be selected for the project.

16. The method of claim 15, wherein the project to be configured includes a custom product, the method further comprising the steps of:

accessing a catalog page to display graphical and textual information pertinent to the product to be configured;

accessing a custom shapes editor to size a product upon configuration and to select a customized combination of dimensional parameters for said product;

accessing an accessories module containing product accessory information; and

producing technical specifications containing technical information regarding the project as configured;

17. An article of manufacture comprising a machine-readable storage medium having stored therein indicia of a plurality of machine-executable control program steps, the control program comprising the steps of:

accessing a user interface;

initiating a project for configuration;

configuring the project by entering project selections;

performing a frame-based inference in response to project selections made in said
configuring step; and

outputting project configuration data to the user interface based on inferences made
in said performing step.

- 5 18. The article of manufacture as recited in claim 17, wherein said performing step
comprises the substep of representing data concerning configuration of the project
in a hierarchical structure, with frames corresponding to configuration categories,
wherein the frames act as nodes of the hierarchical structure containing a collection
of slots corresponding to configuration features and options.
- 10 19. The article of manufacture as recited in claim 18, wherein said performing step
comprises the substep of subjecting selected configuration data of the project to
pertinent rules-based inferences.
- 15 20. In an Internet portal for use by manufacturers, distributors, dealers, retailers, and
retail customers as participants in a vertical market, a method of distributing news,
product information, advertising, discussion forums, and e-commerce transactions,
wherein participants gain access to a configuration system that allows users to
configure products and services as projects such that projects so configured are
automatically transmitted to selected participants for bid, quote, sales, and ordering
of the configured projects.

[illegible]

5

Fig. 1

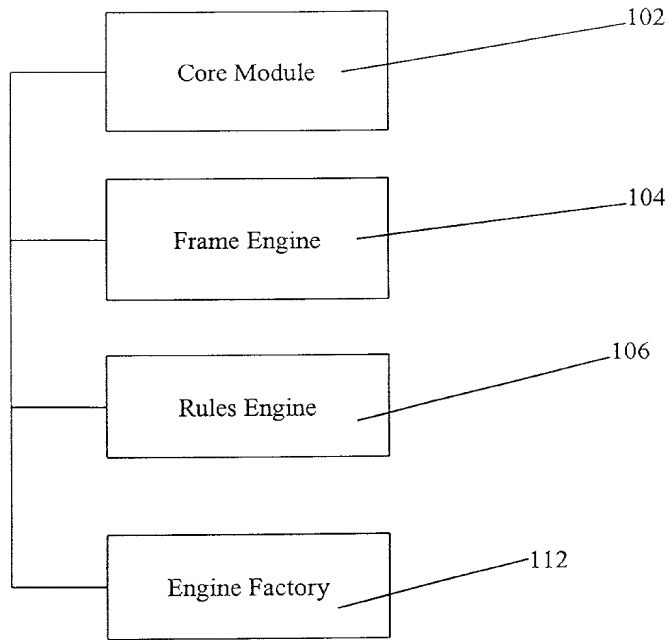


Fig. 2

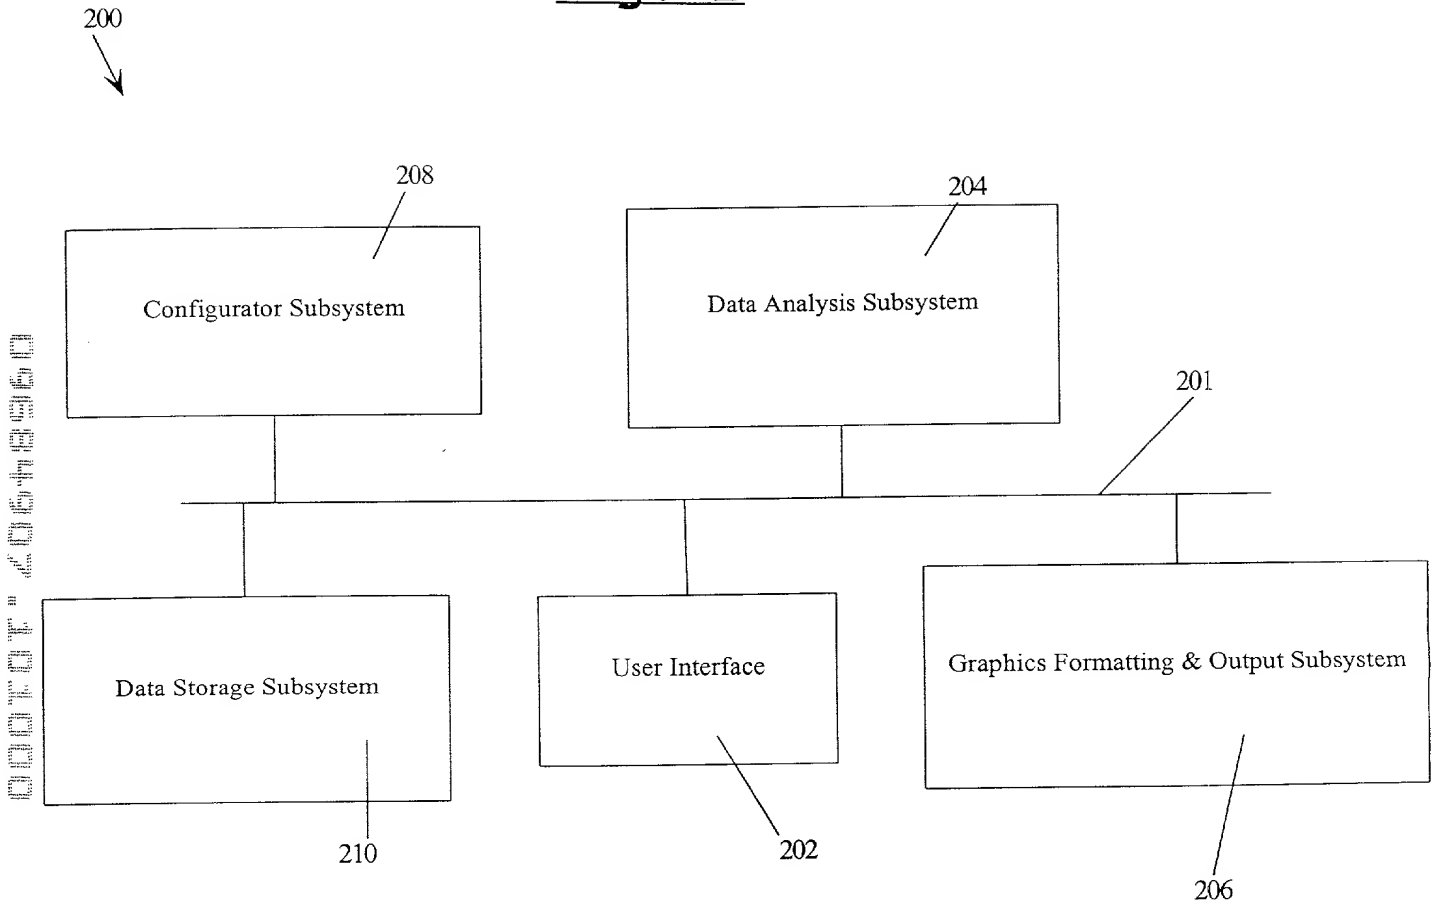


Fig. 3.

0001

Mark Edit Options Help

Save Save To Cancel Next Clear Refresh Price Cat Pages Comments Undo Redo Configure

Item: 0001 Location: Quantity: 1 Product Selection is Complete

Questions	Answers
Manufacturer	Window Company A
Product Type	Double Hung Windows
Exterior Finish	Clad
Product Category	Double Hung Windows
Product Configuration	Twin Unit
Unit Dimension Width	4' 4 3/8"
Rough Opening Width	4' 4 7/8"
Sash Opening Width	2' 0"
Glass Width	20"
Unit Dimension Height	3' 0"
Rough Opening Height	3' 0 1/2"
Sash Opening Height	2' 10"
Glass Height	14 9/16"
Exterior Finish Color/Option	White
Interior Finish Option	Natural
Jamb Width	4 9/16"
Grille Option	Colonial
Grille Type	5/8" Wood
Lite Layout	2W2H
Glazing Method	3/4" Insulated Glass
Glass Type	Clear IG
Tinted Glass Option	No Tint (Clear)
Obscure Glass Option	Non-Obscure
Tempered Glass Option	Tempered Glass
Screen Option	Aluminum Mesh Screen(s)
Screen Frame Color	White
Hardware Color/Finish	White

Description	Amount
White w/ Clear IG Tempered Insul Glass	530.63
Colonial 5/8" Wood 2W2H Grilles	53.22
(2) 2-0x3-2 White Aluminum Mesh Screen(s)	12.60
Total Price	596.45

C2-0H-2-0x3-2W

10

12

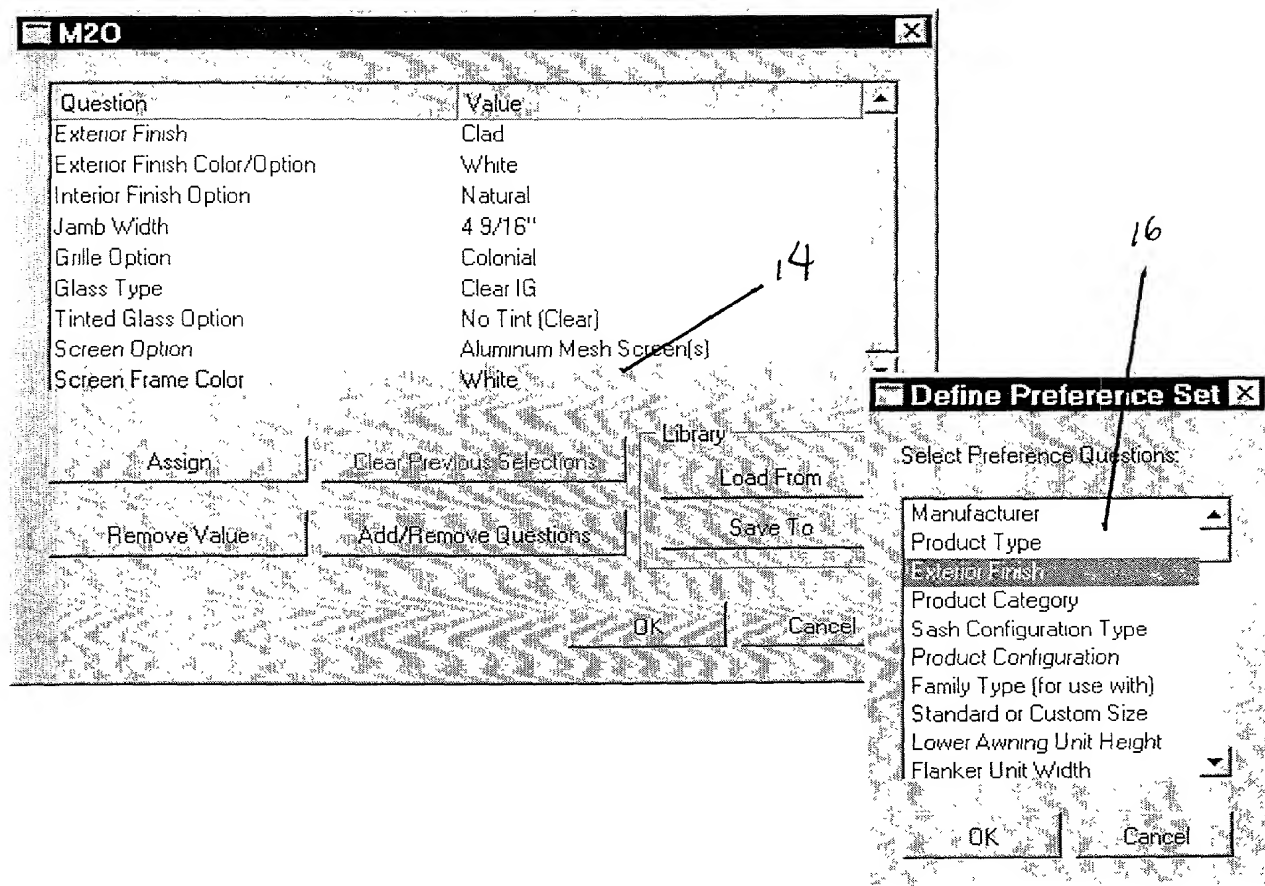
[illegible]

Fig. 5

0001

Mark Edit Options Help

Save S Preferences

Item: 0001

Quantity 1

Select Product Type

Questions

Answers

Manufacturer Window Company, A

Product Type Double Hung Windows

Exterior Finish Clad

Product Category Double Hung Windows

Product Configuration Twin Unit

Unit Dimension Width 4' 4 3/8"

Rough Opening Width 4' 4 7/8"

Sash Opening Width 2' 0"

Glass Width 20"

Unit Dimension Height 3' 0"

Rough Opening Height 3' 0 1/2"

Sash Opening Height 2' 10"

Glass Height 14 9/16"

Exterior Finish Color/Option White

Interior Finish Option Natural

Jamb Width 4 5/16"

Grille Option Colonial

Grille Type 5/8" Wood

Lite Layout 2w2H

Glazing Method 3/4" Insulated Glass

Glass Type Clear IG

Tinted Glass Option No Tint (Clear)

Obscure Glass Option Non-Obscure

Tempered Glass Option Tempered Glass

Screen Option Aluminum Mesh Screen(s)

Screen Frame Color White

Hardware Color/Finish White

Caseement Windows

Awning Windows

Double Hung Windows

Transoms

Radius and Geometric Windows

C2DH-20x3-2w

Description	Amount
White w/ Clear IG Tempered Insul Glass	530.63
Colonial 5/8" Wood 2w2H Grilles	53.22
(2) 20x3 2" White Aluminum Mesh Screen(s)	12.60
Total Price	596.45




Fig. 6.

0011

Mark Edit Options Help

Save Save To Cancel Next Clear Refresh Prefe Adj Price Cat Pages Comments Undo Redo Configure

Item: 0011 Location: Quantity: 1 Select Grille Option

Questions	Answers
Manufacturer	Window Company A
Product Type	Double Hung Windows
Exterior Finish	Clad
Product Category	Double Hung Windows
Product Configuration	Twin Unit
Unit Dimension Width	4' 4 3/8"
Rough Opening Width	4' 4 7/8"
Sash Opening Width	2' 0"
Glass Width	20"
Unit Dimension Height	3' 0"
Rough Opening Height	3' 0 1/2"
Sash Opening Height	2' 10"
Glass Height	14 9/16"
Exterior Finish Color/Option	White
Interior Finish Option	Natural
Jamb Width	4 9/16"
Grille Option	No Grille(s)
Glazing Method	3/4" Insulated Glass
Glass Type	Clear IG
Tinted Glass Option	No Tint (Clear)
Obscure Glass Option	Non Obscure
Tempered Glass Option	Tempered Glass
Screen Option	Aluminum Mesh Screen(s)
Screen Frame Color	White
Hardware Color/Finish	White

No Grille(s) Colonial Pane

20 22


02-DH-2-0x3-2w

Description	Amount
White w/ Clear IG Tempered Insul Glass	530 63
(2) 2-0x3-2 White Aluminum Mesh Screen(s)	12 60
Total Price	543 23

[illegible]

Item: 0002		Location:	Quantity: 1	Select Exterior Finish Color/Option
Questions	Answers			
Product Category	Double Hung Windows			
Product Configuration	Twin Unit			
Unit Dimension Width	4' 4 3/8"			
Rough Opening Width	4' 4 7/8"			
Sash Opening Width	2' 0"			
Glass Width	20"			
Unit Dimension Height	3' 0"			
Rough Opening Height	3' 0 1/2"			
Sash Opening Height	2' 10"			
Glass Height	14 9/16"			
Exterior Finish Color/Option		C2-DH-2-0x3-2		
		White Brown		
Description	Item: 0002	Location:	Quantity: 1	Select Grille Option
	Questions Rough Opening Width Sash Opening Width Glass Width Unit Dimension Height Rough Opening Height Sash Opening Height Glass Height Exterior Finish Color/Option Interior Finish Option Jamb Width Grille Option	Answers 4' 4 7/8" 2' 0" 20" 3' 0" 3' 0 1/2" 2' 10" 14 9/16" White Natural 4 9/16"	C2-DH-2-0x3-2W No Grilles Colonial Prairie	
Description	Item: 0002	Location:	Quantity: 1	Select Manufacturer
	Questions Manufacturer Product Type Exterior Finish Product Category Product Configuration Unit Dimension Width Rough Opening Width Sash Opening Width Glass Width Unit Dimension Height Rough Opening Height	Answers Window Company A Double Hung Windows Clad Double Hung Windows Twin Unit 4' 4 3/8" 4' 4 7/8" 2' 0" 20" 3' 0" 3' 0 1/2"	C2-DH-2-0x3-2W Window Company A Window Company B	
Description White w/ Clear IG Tempered Insul Glass Colonial 5/8" Wood 2W2H Grilles (2) 2-0x3 2 White Aluminum Mesh Screen(s) Total Price		Amount: 530 63 53 22 12 60 596 45		

Fig. 8

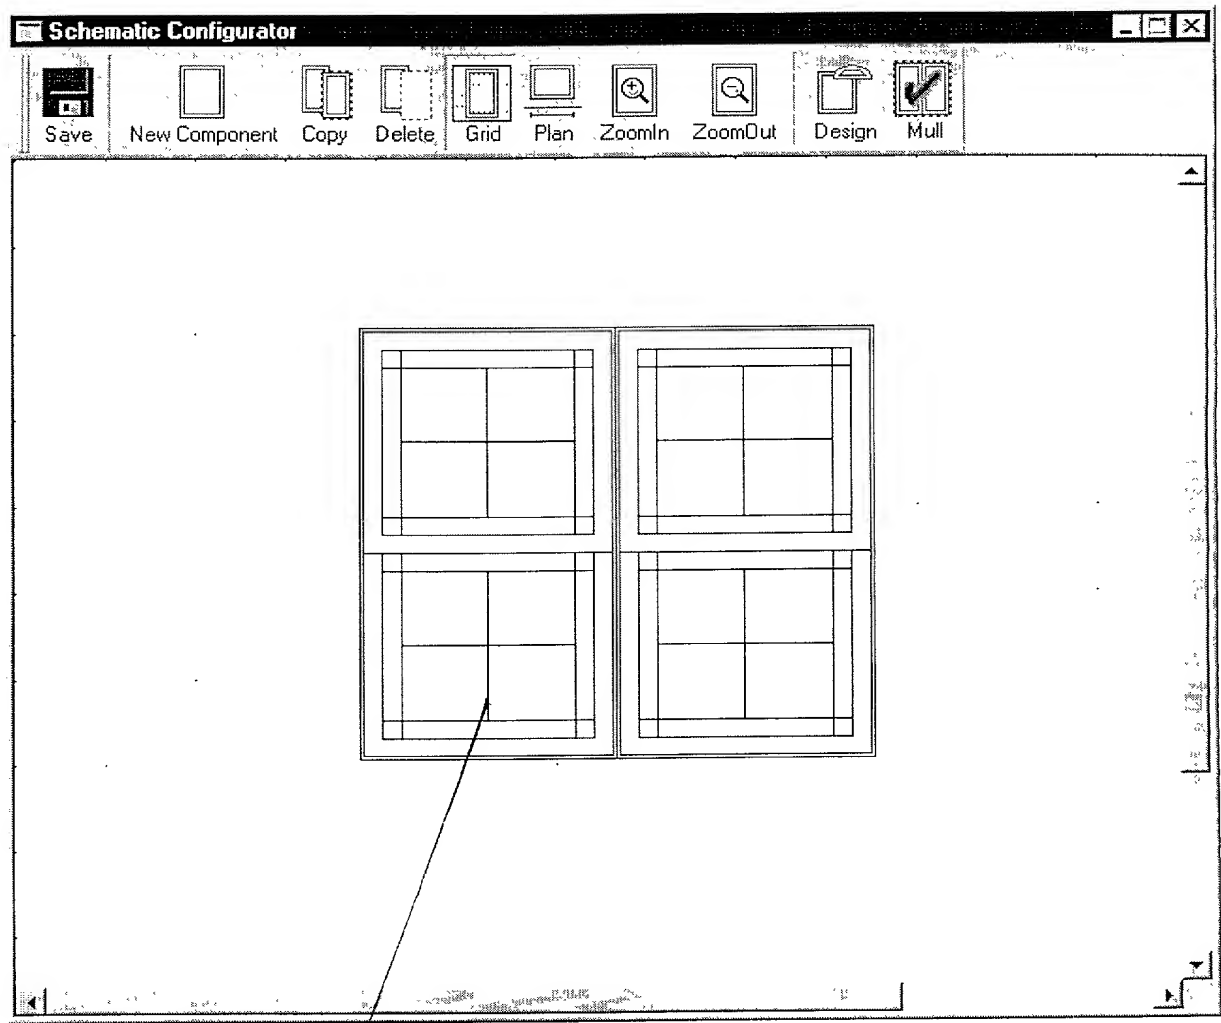

28

Fig. 9

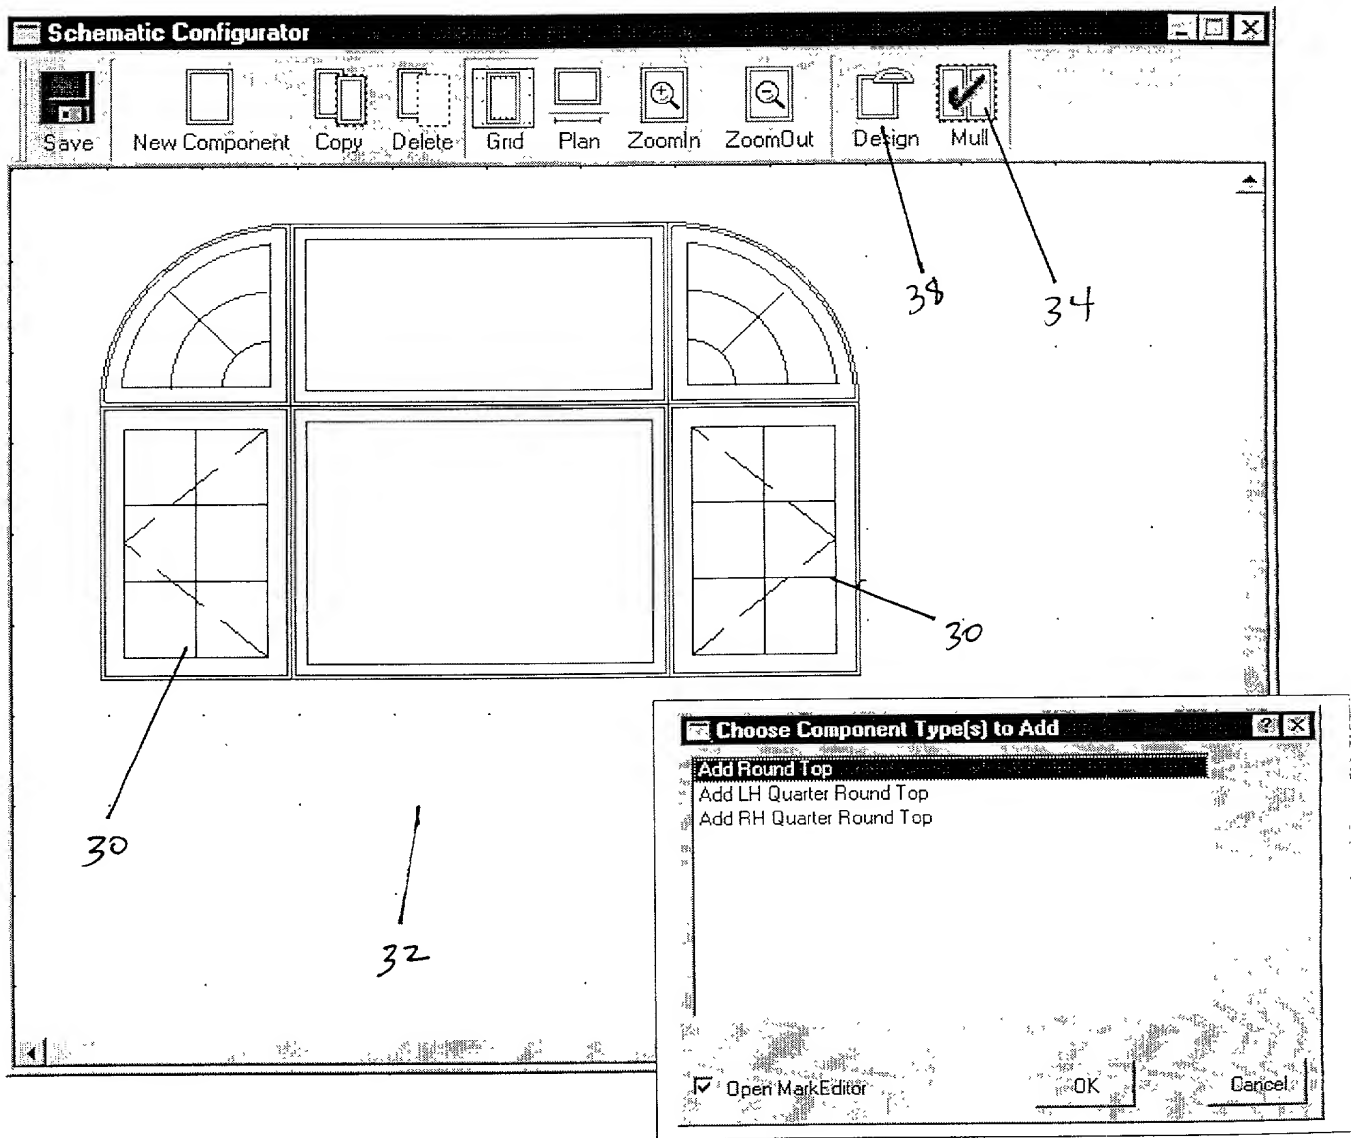


Fig. 10.

0011

Mark Edit Options Help

Save Save To Cancel Next Clear Refresh Prefs Add Price Cat Pages Comments Undo Redo Configure

Item: 0011 Location: Quantity: 1 Select Unit Dimension Width

Questions	Answers	1' 0"	2' 0"	2' 4"	2' 8"
Manufacturer	Window Company A				
Product Type	Double Hung Windows				
Exterior Finish	Clad				
Product Category	Double Hung Windows				
Product Configuration	Single Unit				
Unit Dimension Width					
Rough Opening Width					
Sash Opening Width					
Glass Width					
Unit Dimension Height					
Rough Opening Height					
Sash Opening Height					
Glass Height					
Exterior Finish Color/Option					
Interior Finish Option					
Jamb Width					
Grille Option					
Grille Type					
Grille Bar Color					
Lite Layout					
Glazing Method					
Glass Type					
Tinted Glass Option					
Obscure Glass Option					
Tempered Glass Option					
Screen Option					
Screen Frame Color					

42

44

40

DESCRIPTION

Amount

No Product Code

Demographics		Education		Occupation		Income		Health		Social		Environment		Lifestyle		Attitudes		Behaviors		Outcomes	
Age	25-34	Gender	Male	Occupation	Managerial	Income	\$10,000	Health	Good	Social	High	Environment	Urban	Lifestyle	Active	Attitudes	Positive	Behaviors	Healthy	Outcomes	Low
Age	35-44	Gender	Female	Occupation	Professional	Income	\$15,000	Health	Fair	Social	Medium	Environment	Suburban	Lifestyle	Sedentary	Attitudes	Neutral	Behaviors	Unhealthy	Outcomes	Medium
Age	45-54	Gender	Male	Occupation	Skilled	Income	\$8,000	Health	Poor	Social	Low	Environment	Rural	Lifestyle	Inactive	Attitudes	Negative	Behaviors	Unhealthy	Outcomes	High
Age	55-64	Gender	Female	Occupation	Unskilled	Income	\$5,000	Health	Very Poor	Social	Very Low	Environment	Urban	Lifestyle	Very Inactive	Attitudes	Very Negative	Behaviors	Very Unhealthy	Outcomes	Very High
Age	65-74	Gender	Male	Occupation	Retired	Income	\$12,000	Health	Good	Social	High	Environment	Suburban	Lifestyle	Active	Attitudes	Positive	Behaviors	Healthy	Outcomes	Low
Age	75-84	Gender	Female	Occupation	Retired	Income	\$10,000	Health	Fair	Social	Medium	Environment	Urban	Lifestyle	Sedentary	Attitudes	Neutral	Behaviors	Unhealthy	Outcomes	Medium
Age	85-94	Gender	Male	Occupation	Retired	Income	\$8,000	Health	Poor	Social	Low	Environment	Rural	Lifestyle	Inactive	Attitudes	Negative	Behaviors	Unhealthy	Outcomes	High
Age	95-104	Gender	Female	Occupation	Retired	Income	\$5,000	Health	Very Poor	Social	Very Low	Environment	Urban	Lifestyle	Very Inactive	Attitudes	Very Negative	Behaviors	Very Unhealthy	Outcomes	Very High

46

Fig. 12.

0011

Mark Edit Options Help

Save Save To Cancel Next Clear Refresh Prefs Adj Price Cat Pages Comments Undo Redo Configure

Item: 0011 Location:

Questions	Answers
Manufacturer	Window Company A
Product Type	Radius and Geometric
Exterior Finish	Clad
Product Category	Spandrel Geometric W
Product Configuration	RH Right Triangle
Unit Dimension Width	
Rough Opening Width	
Unit Dimension Height	
Rough Opening Height	
Exterior Finish Color/Option	
Interior Finish Option	
Jamb Width	
Grille Option	
Grille Type	
Grille Bar Color	
Lite Layout	
Glazing Method	
Glass Type	
Tinted Glass Option	
Obscure Glass Option	
Tempered Glass Option	

48


Choose: RH Right Triangle Cancel

Dimension Type:

Frame Size

A: 15'0"

B: 7'0"



Run: 12 Rise: 4 W: 5'0" H: 7'0"

PITCH

Compute

OK

CI-TRIANG

Fig. 13.

0001

Mark Edit Options Help

Save Save To Cancel Next Clear Refresh Prefs Adj Price Cat Pages Comments Undo Redo Configure

Item: 0001 Location: Quantity: 1 Product Selection is Complete

Questions	Answers
Manufacturer	Window Company A
Product Type	Double Hung Windows
Exterior Finish	Clad
Product Category	Double Hung Windows
Product Configuration	Twin Unit
Unit Dimension Width	4' 4 3/8"
Rough Opening Width	4' 4 7/8"
Sash Opening Width	2' 0"
Glass Width	20"
Unit Dimension Height	3' 0"
Rough Opening Height	3' 0 1/2"
Sash Opening Height	2' 10"
Glass Height	14 9/16"
Exterior Finish Color/Option	White
Interior Finish Option	Natural
Jamb Width	4 9/16"
Grille Option	Colonial
Grille Type	5/8" Wood
Lite Layout	2W2H
Glazing Method	3/4" Insulated Glass
Glass Type	Clear IG
Tinted Glass Option	No Tint (Clear)
Obscure Glass Option	Non-Obscure
Tempered Glass Option	Tempered Glass
Screen Option	Aluminum Mesh Screen(s)
Screen Frame Color	White
Hardware Color/Finish	White

Description	Amount
White w/ Clear IG Tempered Insul Glass	530.63
Colonial 5/8" Wood 2W2H Grilles	53.22
2) 2-0x3-2 White Aluminum Mesh Screen(s)	12.60
Total Price	596.45

53

50, 52

C2-DH-2-0x3-2W

Figure 1 consists of 15 small plots arranged in a grid. The first 10 plots show the relationship between the probability of a child being in a household with a child and various variables: (a) Age of child, (b) Sex of child, (c) Ethnicity, (d) Religion, (e) Marital status, (f) Income, (g) Education, (h) Employment, (i) Health status, and (j) Social network. The remaining 5 plots show the relationship between the probability of a child being in a household with a child and various variables: (k) Age of parent, (l) Sex of parent, (m) Ethnicity, (n) Religion, and (o) Marital status. Each plot includes a legend and a title.

Close

Debug

Undo

Questions / Selections

Application

Category

Length

Number

Length

Case ment

Mulling

Custom (cut by the foot)

15" Bow Mullion - WHITE

3'

Answers

Enter Length in Inches

Custom Answer

3'

Shopping Cart

Item #778 15" Bow Mullion - WHITE, 3' inches

1

5.10

New

Del

Edit Status:

edgenet

Table 1. Demographic characteristics of the study population	
Age (years)	50.0 ± 10.0
Gender	
Male	50.0%
Female	50.0%
Education	
High school	50.0%
University	50.0%
Occupation	
Unemployed	50.0%
Employed	50.0%
Marital status	
Married	50.0%
Single	50.0%
Divorced	50.0%
Widowed	50.0%
Health status	
Healthy	50.0%
Diseased	50.0%
Smoking status	
Smoker	50.0%
Non-smoker	50.0%
Alcohol consumption	
Alcohol consumer	50.0%
Non-alcohol consumer	50.0%
Family size	
1-2	50.0%
3-4	50.0%
5-6	50.0%
7-8	50.0%
9-10	50.0%
11-12	50.0%
13-14	50.0%
15-16	50.0%
17-18	50.0%
19-20	50.0%
21-22	50.0%
23-24	50.0%
25-26	50.0%
27-28	50.0%
29-30	50.0%
31-32	50.0%
33-34	50.0%
35-36	50.0%
37-38	50.0%
39-40	50.0%
41-42	50.0%
43-44	50.0%
45-46	50.0%
47-48	50.0%
49-50	50.0%
51-52	50.0%
53-54	50.0%
55-56	50.0%
57-58	50.0%
59-60	50.0%
61-62	50.0%
63-64	50.0%
65-66	50.0%
67-68	50.0%
69-70	50.0%
71-72	50.0%
73-74	50.0%
75-76	50.0%
77-78	50.0%
79-80	50.0%
81-82	50.0%
83-84	50.0%
85-86	50.0%
87-88	50.0%
89-90	50.0%
91-92	50.0%
93-94	50.0%
95-96	50.0%
97-98	50.0%
99-100	50.0%

56

26

Fig. 10.

Order Form Viewer

EdgeNet, Inc.

Customer Ray Hill

Purchaser Ray Hill

Page _____ Of _____

Unit Order Form

Location 481 Ocean Blvd
Integrity GA 30556

Job Name Pillsbury Residence

Ship Date _____
SN _____

Quote # _____ P.O.# _____

Date Wed Oct 04 2000

%Discount _____

QTY	Product Code RO Width X Height (1)	Ext. Finish (2)	Hinge (3)	Glass (4)	PWS/ RDG (5)	Grill/Divided Light (6)			Jamb Width (7)	Inf. Prime (8)	Screen (9)		Hard- ware (10)	Balance/Tro- ck (11)		Ext. Trim (12)	Arch'd Casing (13)		ELEV
						Type	Style	Pattern			Bar	LS		IN	A		B	W	
STANDARD UNITS																			
C2-CAS-1.8x3-0W		WH	LR	OPD					1 3/8"	4 9/16"	WH	RM							
C12 AM/N-2 4x1.8W		WH	SAV	OPD					1 3/8"	4 9/16"	WH	RM							
C2-OH-2-0x3 2W		WH		OPD					1 3/8"	4 9/16"	WH	RM		X	PWR				
Prep For Sool																			
C2 CAS-1.8x3 0W		WH	LR	OPD					1 3/8"	4 9/16"	WH	RM							

26

[Previous Page](#)

[Next Page](#)

[Print](#)

[Close](#)

Fig. 17

Order Form Viewer

000006 Pricing Quote/Long Form Wed Oct 04 2000


edgenet EdgeNet, Inc.
6 Cadillac Dr., Suite 260
Brentwood, TN 37027
(877) EDGENET

DATE Wed Oct 04 2000

QUOTE 000006 CUSTOMER Ray Hill PROJECT Pillsbury Residence
SALES REP Jack Spradigan PO# CONTACT Ray Hill
TERMS Net 30 Days PHONE (770) 876-3425
ADDRESS 461 Ocean Blvd
Integrity GA 30556
Delivery/Pickup Delivery

COMMENTS

EdgeNet, Inc. PROPOSES TO FURNISH PRODUCTS AS STATED BELOW.

ITEM	LOCATION	PRODUCT CODE	UNIT PRICE	QTY	TOTAL PRICE
FRAME SIZE		DESCRIPTION			
0001		MANUFACTURER Window Company A		1	
Frame Size = 3' 4" W x 3' 0" H RO Size = 3' 4 3/4" W x 3' 0 1/2" H		C2-CAS-1-8x3-0W Clad Wood Casement Windows Twin Unit (2-Wide) White Exterior Finish Natural Interior Finish Handing LR 4 9/16" Jamb Width Tempered Clear IG White Regular Handle			
		White w/ Clear IG Tempered Insul Glass \$ 517 16 Colonial 5/8" Wood 2W3H Grilles \$ 53 49 (2) 1-8x3-0 White Aluminum Mesh Screen(s) \$ 33 58			
			\$ 604 23		\$ 604 23

Previous Page

Next Page

Print

Close

Fig. 18.

Order Form Viewer

Project Schedule - Pillsbury Residence

Item	Product Code	Quantity	Finish	Product Type	Configuration	RO Width	RO Height	Jamb
0005	C2-CAS-1-8x3-0W	1	White	Casement Windows	Twin Unit (2-Wide)	3' 4 3/4"	3' 0 1/2"	
0003	C2-DH-2-0x3-2W	1	White	Double Hung Windows	Twin Unit	4' 4 7/8"	3' 0 1/2"	
0002	C12-AVWN-2-4x1-8W	1	White	Awning Windows	One-Wide/Two-High Unit	2' 4 1/2"	3' 4 1/2"	
0001	C2-CAS-1-8x3-0W	1	White	Casement Windows	Twin Unit (2-Wide)	3' 4 3/4"	3' 0 1/2"	

Previous Page

Next Page




Print

Close

Table 1. Continued	
Variable	Mean (SD)
Age (years)	45.2 (12.5)
Gender (male/female)	18/12
Marital status (married/divorced/separated/widowed)	15/10/10/10
Education (years)	12.5 (2.5)
Income (USD/month)	1,200 (300)
Health insurance (yes/no)	20/0
Smoking status (smoker/non-smoker)	10/10
Alcohol consumption (yes/no)	10/10
Exercise frequency (times/week)	2.5 (1.5)
Stress level (low/moderate/high)	10/10/10
Family size (number of children)	2.5 (1.5)
Work status (employed/unemployed)	15/5
Comorbidities (hypertension/diabetes/asthma)	10/10/10
Medication use (yes/no)	10/10
Healthcare utilization (times/year)	2.5 (1.5)
Quality of life score (0-100)	65 (15)
Life satisfaction (satisfied/dissatisfied)	10/10
Overall health (good/fair/poor)	10/10/10



Fig. 20.

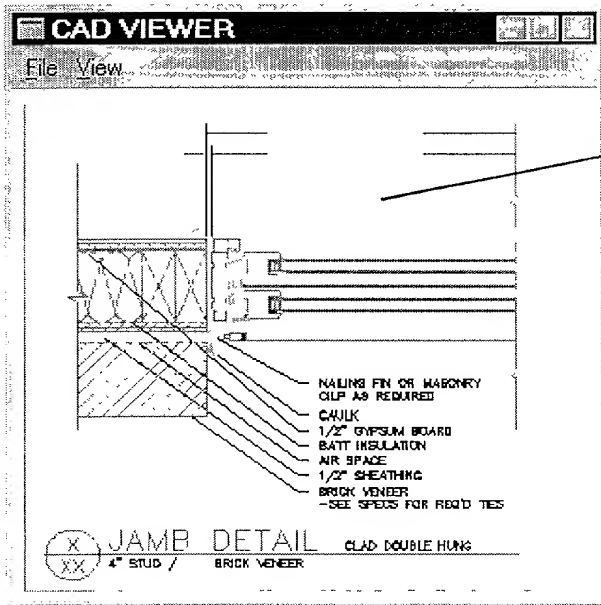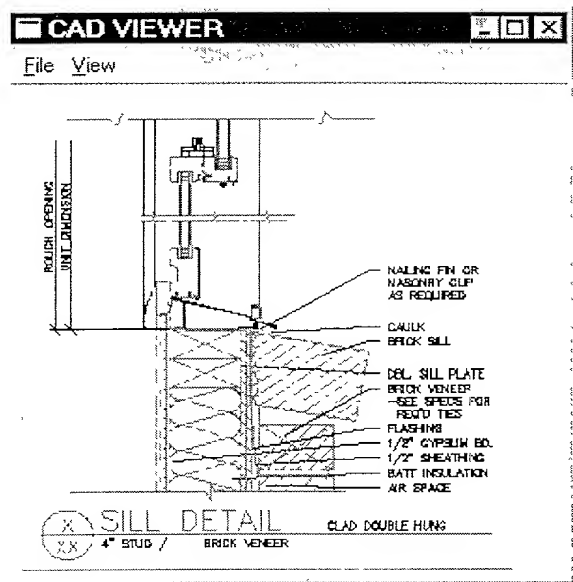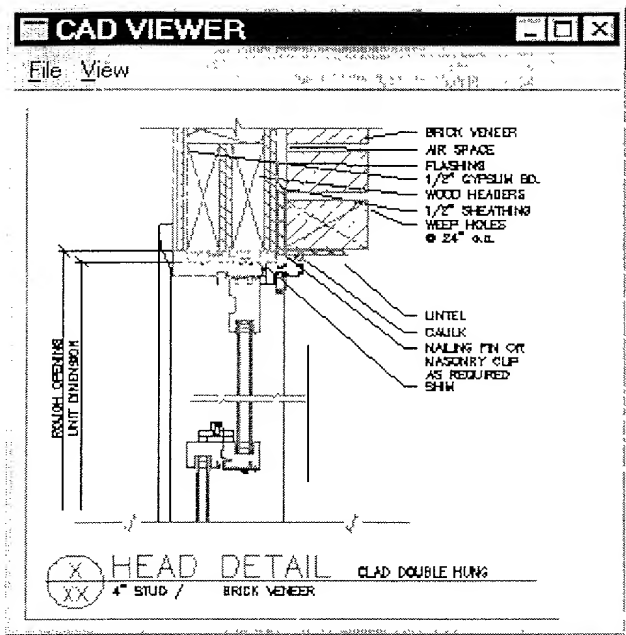

62

000001 20548960

Fig. 21.

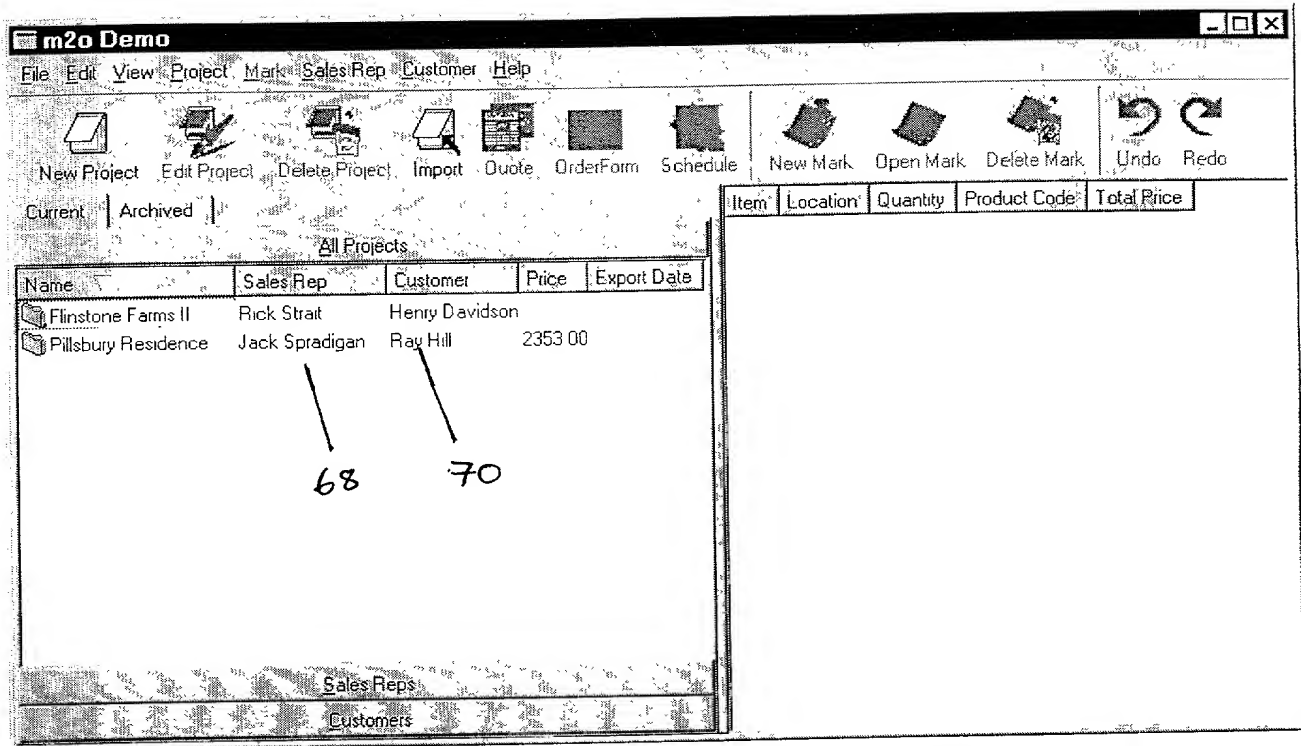


Fig. 21

The 'Edit Project' dialog box is shown. It includes fields for 'Quote #' (000006), 'Sales Rep' (Jack Spradigan), 'Date' (Wed Oct 04 16:44:04 2000), 'Name' (Pillsbury Reside), and 'Price Mult' (1.0). The 'Project Information' section has tabs for 'Shipping Address' and 'Billing Address'. The 'Shipping Address' tab is active, showing fields for Name (Ray Hill), Phone ((770) 876 3425), Fax ((770) 876 3420), Address1 (461 Ocean Blvd), Address2, City (Integrity), State/Province (GA), Zip Code (30556), and Country. The 'Customer Information' section shows 'Customer' (Ray Hill), 'Tax' (6.0000), 'PO #', 'Terms' (Net 30 Days), and a 'Comments' field. Handwritten annotation '72' points to the 'Comments' field. At the bottom, there are 'Line Item Adjust', 'OK', and 'Cancel' buttons.

Fig. 22.

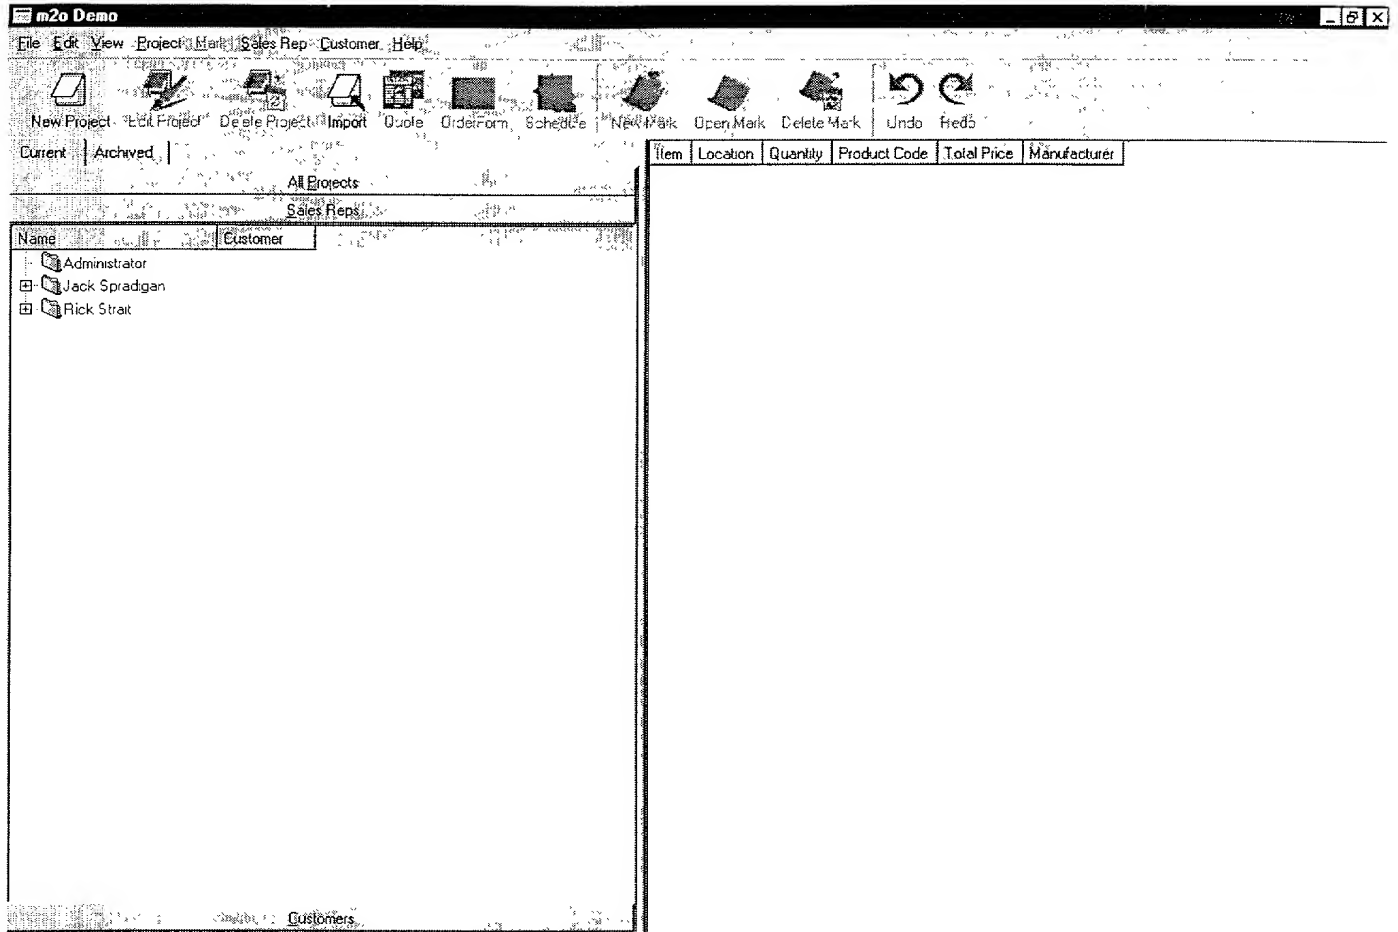


Fig. 22

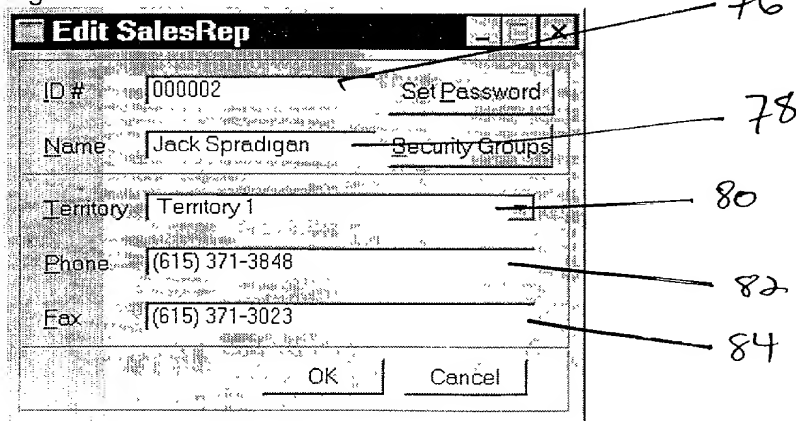


Fig. 23

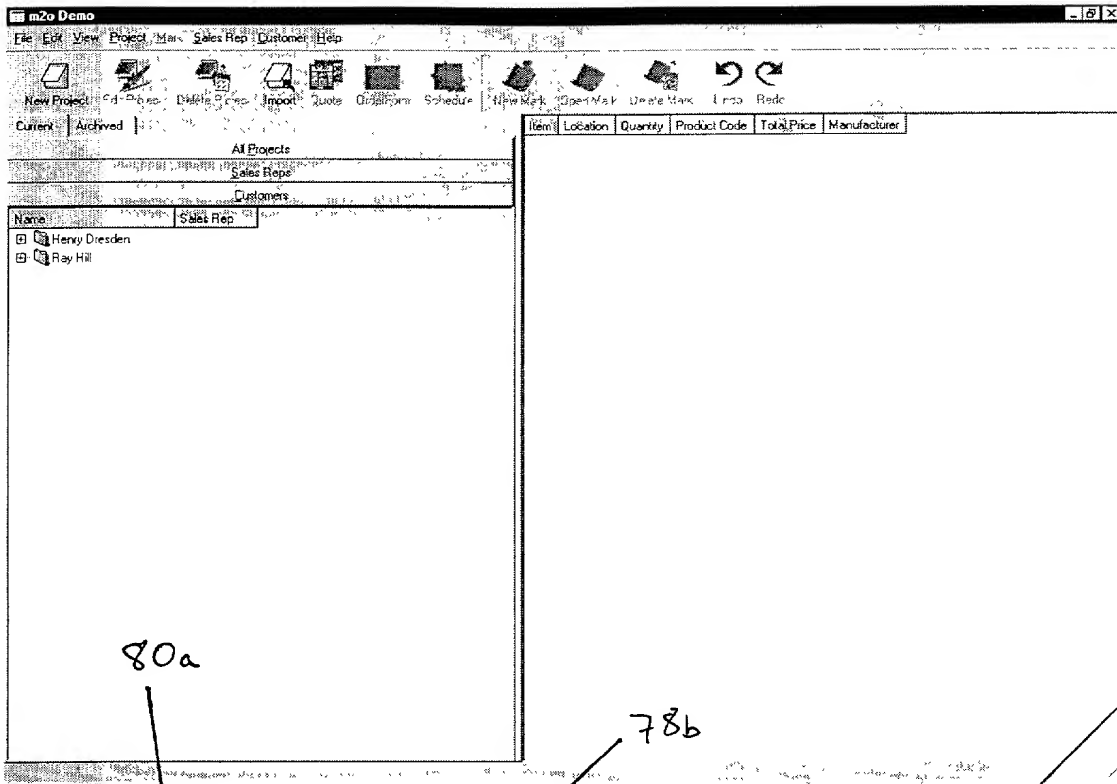


Fig. 23

The 'Edit Customer' dialog box is shown, with the 'Shipping Address' tab selected. The form contains the following fields and values:

Billing Address		Shipping Address	
Contact	Ray Hill	ID #	000001
Phone	(770) 876-3425	Name	Ray Hill
Fax	(770) 876-3420	Sales Rep	Jack Spradigan
Address1	461 Ocean Blvd	Price Mult	1.0
Address2		Cust. Type	Contractor
City	Integrity	Terms	Net 30 Days
State/Province	GA	Tax Code	
Zip Code	30556	Comments	
Country			

At the bottom of the dialog, there are 'OK' and 'Cancel' buttons. A handwritten label '78a' points to the 'ID #' field, '78b' points to the 'Name' field, and '8b' points to the 'Terms' field. A label '76a' points to the 'Customers' list in the previous screenshot.

Fig. 24

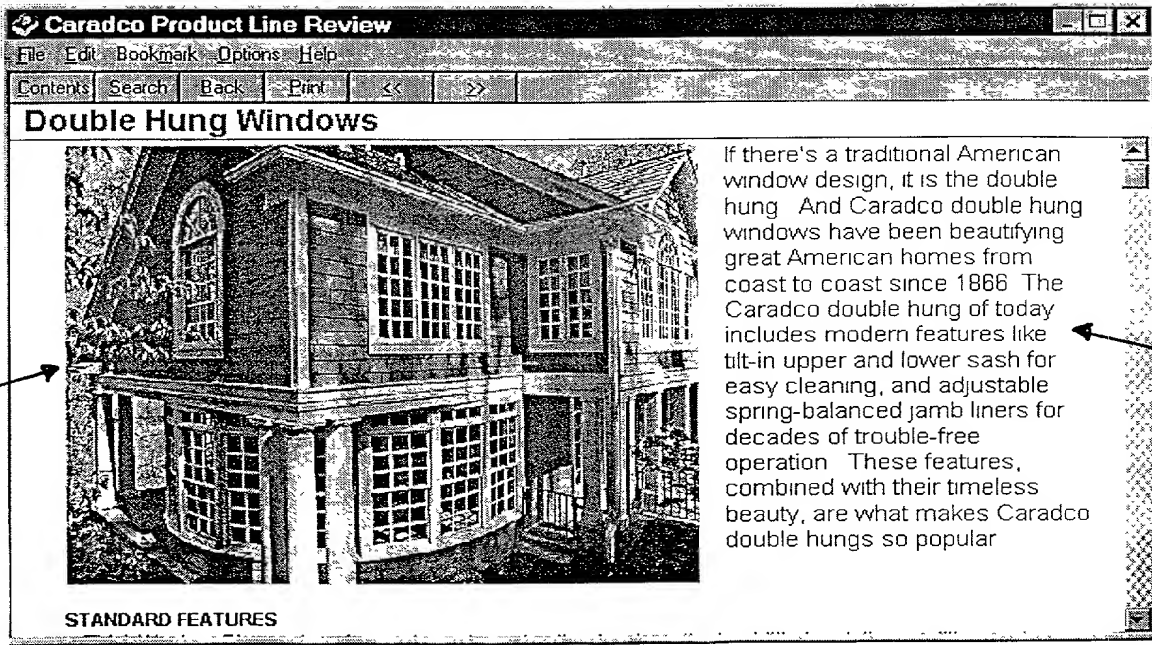
[illegible]

Fig. 26


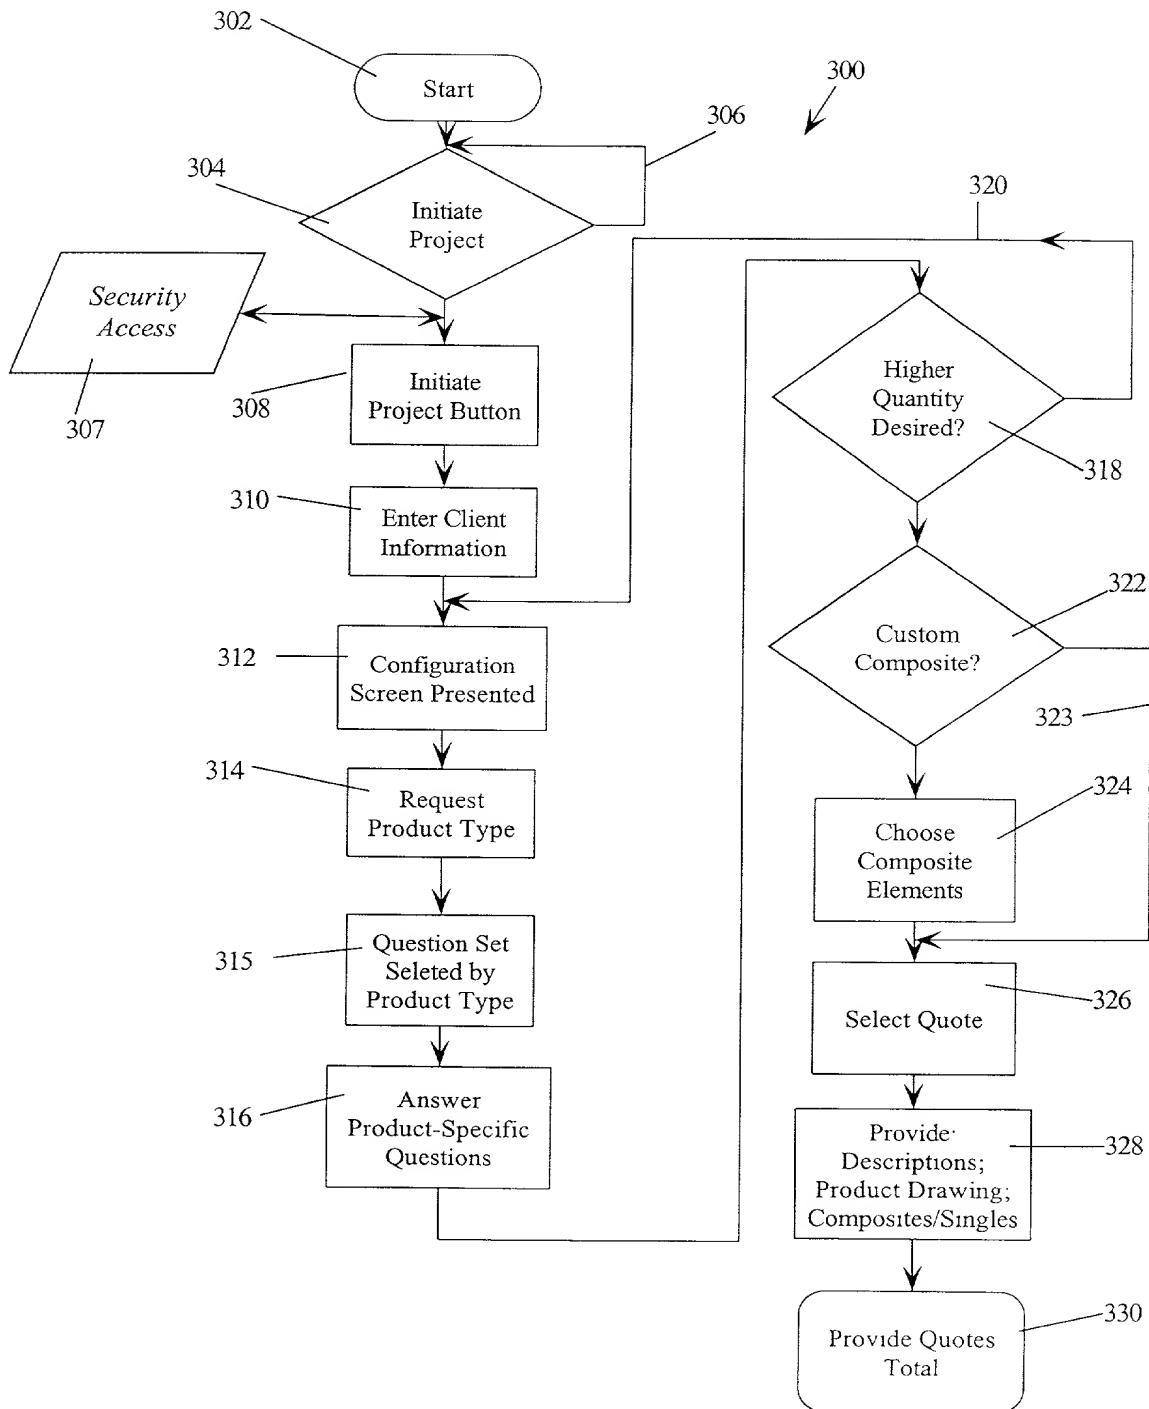


Fig. 27

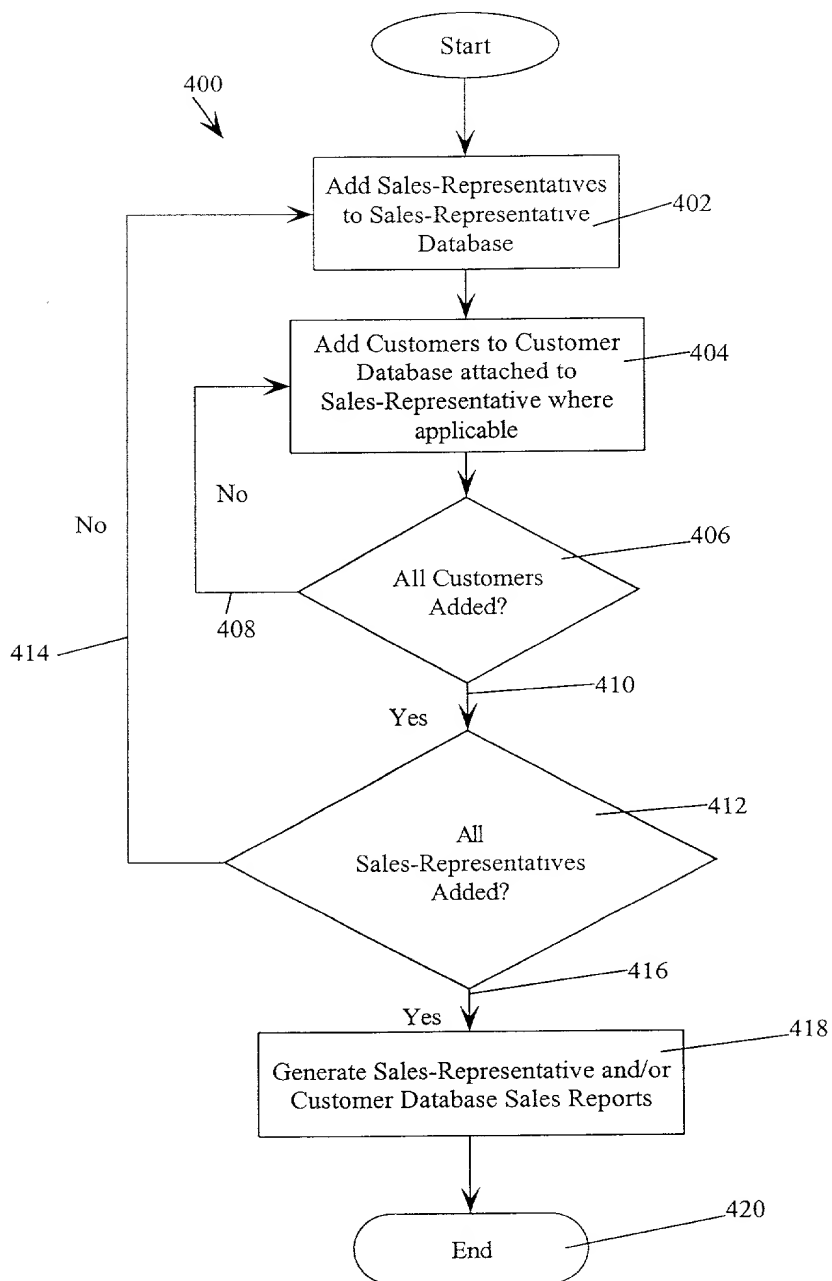

0964907-101000

Fig. 28

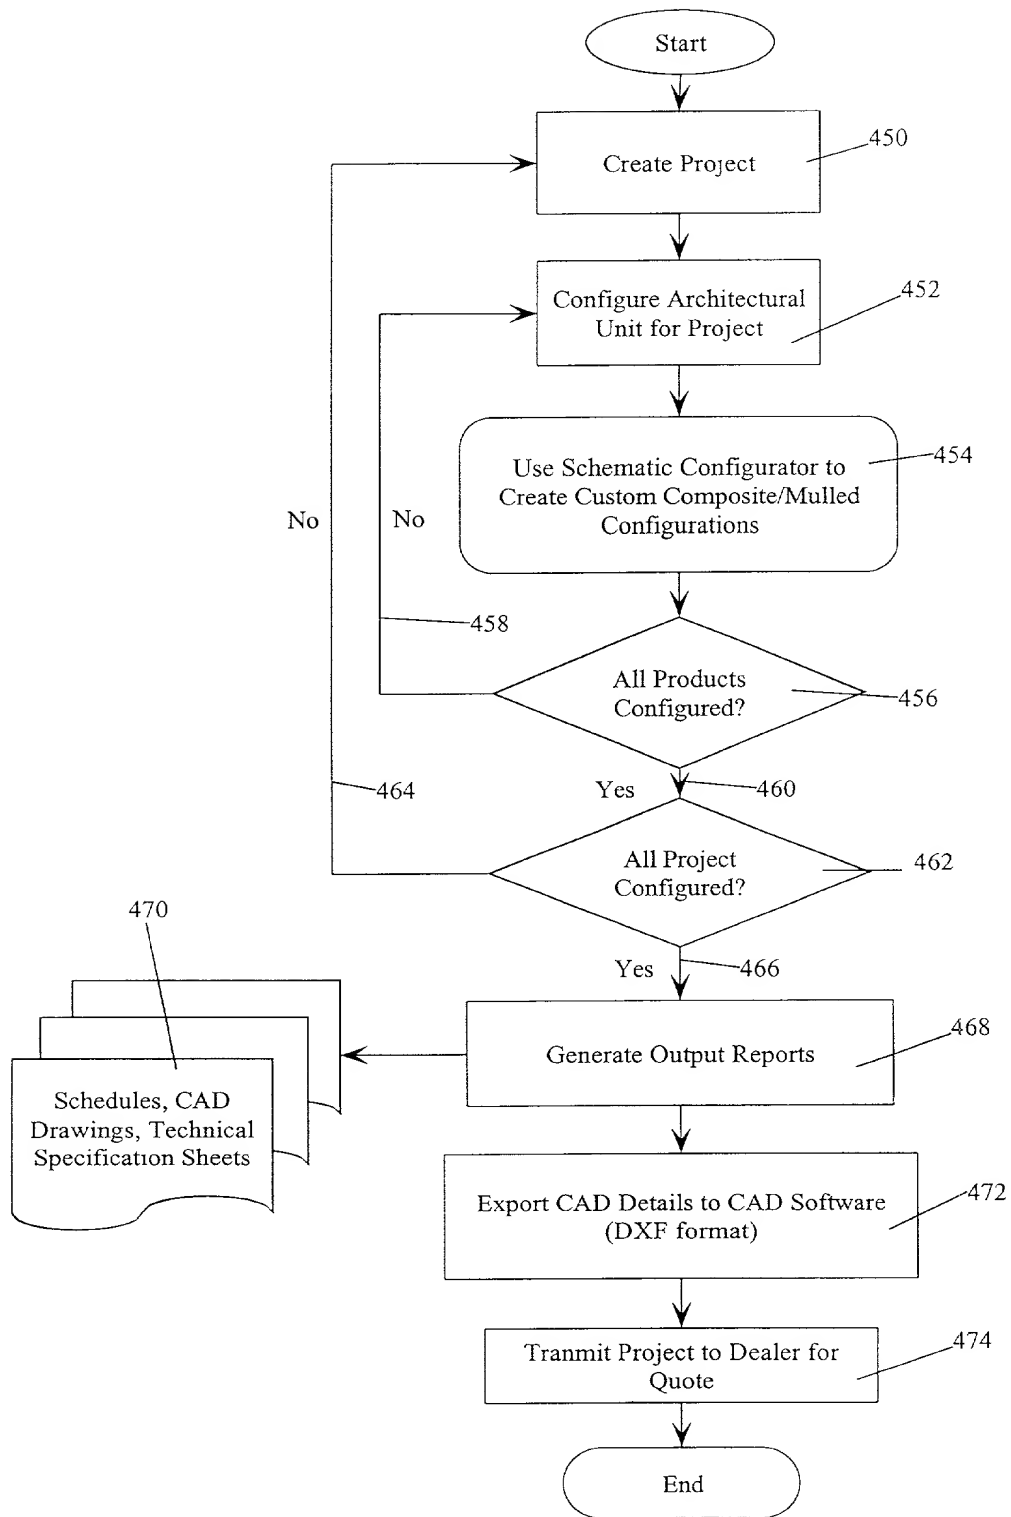


Fig. 31


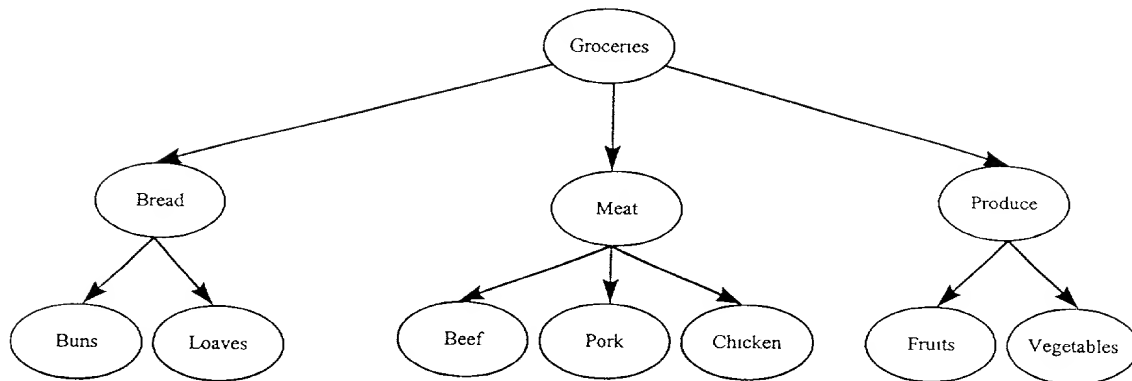


Fig. 32

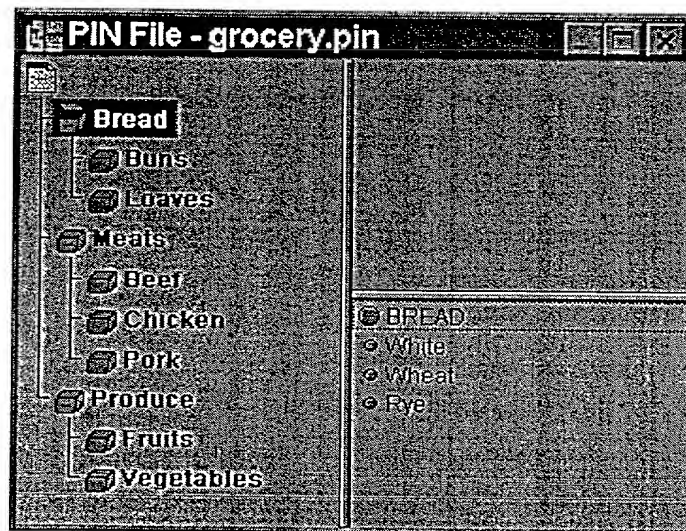

Patent and Trademark Office U S DEPARTMENT OF COMMERCE

PATENT Docket No.: F0710 0000/P001
Serial No.: Not Yet Assigned

Page 2

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below.

60/158,316 October 8, 1999
(Application Serial No.) (Filing Date)

60/158,250 October 8, 1999
(Application Serial No.) (Filing Date)

(Application Serial No.) (Filing Date)

I hereby claim the benefit under 35 U.S.C. Section 120 of any United States application(s), or Section 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. Section 112. I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C.F.R., Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application;

(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
09/678,123	01/15/2010	Patented
10/234,567	03/22/2011	Pending
11/345,678	05/10/2012	Abandoned

(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
--------------------------	---------------	--

(Application Serial No)	(Filing Date)	(Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

PATENT Pocket No.: E0710 0000/P001
Serial No.: Not Yet Assigned

Page 3


POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:


Gary M. Hoffman, 26,411; Thomas J. D'Amico, 28,371; Donald A. Gregory, 28,954; James W. Brady Jr., 32,115; Jon D. Grossman, 32,699; Mark J. Thronson, 33,082; Christopher S. Chow, 46,493; Jeremy A. Cubert, 40,399; Laurence E. Fisher, 37,131; Brian A. Lemm, 43,748; John F. Levis, 34,210; Gianni Minutoli, 41,198; Edwin Oh, 45,319; Eric Oliver, 35,307; William E. Powell III, 39,803; Mark E. Stuckland, 45,138 and Salvatore P. Tamburo, P-45,153

Send Correspondence to:

Eric Oliver
Dickstein Shapiro Morin & Oshinsky LLP
2101 L Street NW
Washington, DC 20037-1526

Direct Telephone Calls to: (202) 785-9700

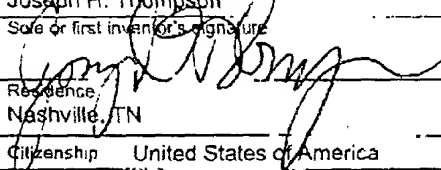
Full name of sole or first inventor	
Joseph H. Thompson	
Signature of first inventor's signature	Date
	10/10/00
Residence	
Nashville, TN	
Citizenship United States of America	
Post Office Address	
850 Glendale Lane	
Nashville, TN 37204	

Full name of second inventor	
Randy J. Weems	
Signature of second inventor's signature	Date
	10/10/2000
Residence	
Laverne, TN	
Citizenship United States of America	
Post Office Address	
186 Sanders Drive	
Laverne, TN 37086	

POWER OF ATTORNEY

PATENT Docket No.: E0710 0000/P001
Serial No.: Not Yet Assigned

Page 4

Full name of third inventor, if any Edward A. Lessman	
Third inventor's signature 	Date Oct 10, 2000
Residence Nashville, TN	
Citizenship United States of America	
Post Office Address 141 Neese Drive, Apartment Q-358 Nashville, TN 37211	
Full name of fourth inventor, if any	
Fourth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	
Full name of fifth inventor, if any	
Fifth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	
Full name of sixth inventor, if any	
Sixth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	